



Simulation and Analysis of Leaf Spring Using Stainless Steel Material

Vinay Sunariya¹, L Boriwal²

¹PG Student, Department of Mechanical Engineering, Sagar Institute of Research & Technology Indore, India

²Associate Professor, Department of Mechanical Engineering, Sagar Institute of Research & Technology Indore, India

ABSTRACT

In this work, stainless steel material is used for the simulation and analysis. Stainless steel is mostly used in the manufacturing industry. The 3D model of leaf spring has been created in solid works. Total 10 leaf has been consider for the analysis along with the full length leaf. In this study, 5 mm deformation has been consider for all three material. Equivalent mesh size has been implemented for all three material leaf spring. Ansys workbench software has been used to analyze is the stress and stain development in the leaf spring under the 5 mm deformation condition.

Keywords: Leaf Spring, Stainless steel, simulation, Equivalent stress, Normal stress

1.Introduction

A spring role in vehicle as an elastic body. When the vehicle is in dynamic condition than continuous different intensity load is acting on it and spring is to distort. When vehicle is in static condition it comes user its original shape. As shown in Figure 1, the laminated or leaf spring (also known as flat spring or carriage spring) is made up of a number of flat plates (known as leaves) of varied lengths connected together by clamps and bolts. The majority of these are found in autos. Tensile and compressive stresses are the most common stresses produced by leaf springs. Flat plates are used to make leaf springs (also known as flat springs). The advantage of a leaf spring over a helical spring is that the spring's ends can be steered along a certain path as it deflects, acting as a structural member as well as an energy absorber. In addition to shocks, the leaf springs may handle lateral loads, brake torque, driving torque, and so on. Existing work on light composite elliptical springs for automobile suspension by Mahdi a and O.M.S. Alkoles [1]. They collaborated on a project that combined an elliptical design with woven roving composites. The effect of elasticity ratio on the performance of woven roving wrapped composite elliptical springs has been studied both experimentally and numerically in this paper. The substance developed by S Amare et al. [3] plays an important role in each assembling interaction. Using the composite material E-Glass/Epoxy composite, the article also displays and addresses the critical challenges of vehicle weight. Their work focuses on maintaining a stable cross segment arrangement, weight loss, and a strategy.

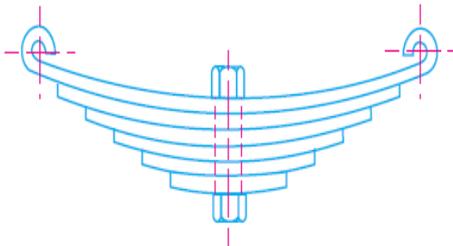


Figure 1: Schematic diagram of leaf spring

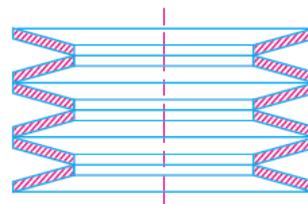


Figure 2: Disc or Belleville springs

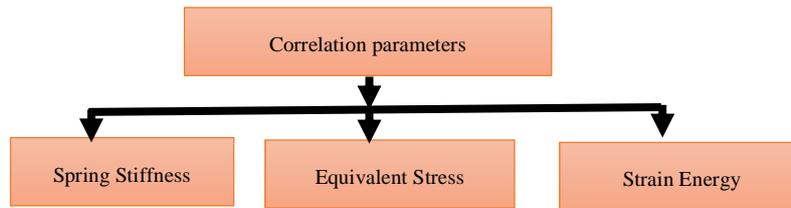


Figure 3 Correlation parameters

2.0 Simulation of Process

A spring is defined as an elastic body, whose function is to distort when loaded and to recover its original shape when the load is removed.

The various important applications of springs are as follows:

1. In car springs, railway buffers, air-craft landing gears, shock absorbers, and vibration dampers, to pad, fascinate, or control energy due to shock or vibration.
2. To exert force, such as in brakes, clutches, and spring-loaded valves.
3. To control motion by keeping two parts in touch, as in cams and followers.
4. In spring balances and engine indicators, to measure forces.
5. To store energy in watches, toys, and other devices.

The solidworks software has been used to create the 3D model of the leaf spring analysis. After that, the developed 3D model has imported with the help of Ansys workbench software for further analysis with following steps

1. Import 3D model of leaf spring file in to Ansys
2. Static structural module has been selected for analysis
3. Meshing has been applied on the developed model
4. Boundary conditions has been applied over the 3D model of leaf spring

3.0 Simulation & Modeling

Almost all the problems related with the engineering and sciences are governed by the differential or integral equation. With the help of this equation, the user get an exact or closed to the solution to the particular problem being studied. Stiffness is generally expressed as ratio of force to deflection as, $K = \text{force} / \text{deflection}$. Spring stiffness is important parameter to monitor spring deflection and its attributes. To improve the handling of vehicle the value of stiffness should be high. Stress is the second important element for leaf springs. Equivalent Stress generally co-relate with durability of leaf springs

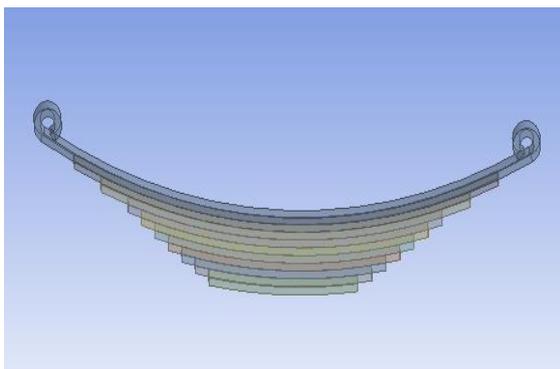


Figure 4. 3D model of Leaf spring

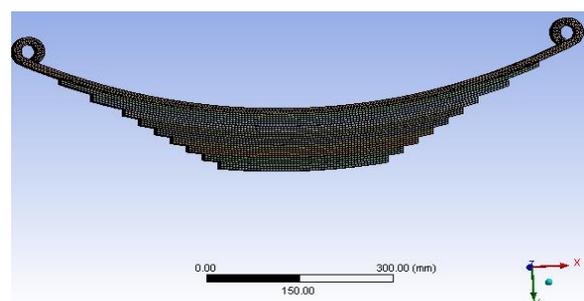


Figure 5 Meshed surface of 3D leaf spring

4. Results and Discussion

In this study, 242301 nodes and 66084 element has been selected in meshing zone for 3D leaf spring model. The node is the junction of the elements. This numbers are clearly indicate the density of the meshing.

4.1 Effect of Stainless Steel material on characteristics

Figure 5 shown the total deformation in the leaf spring. The maximum total deformation 5.02 mm has been recorded as shown in Figure 5.

Figure 6 depicts the equivalent stress in leaf spring. Maximum 2220.3 MPa equivalent stress has been observed. Figure7 shown the normal stress developed in the leaf spring. 1739.1MPa has been observed during the analysis.

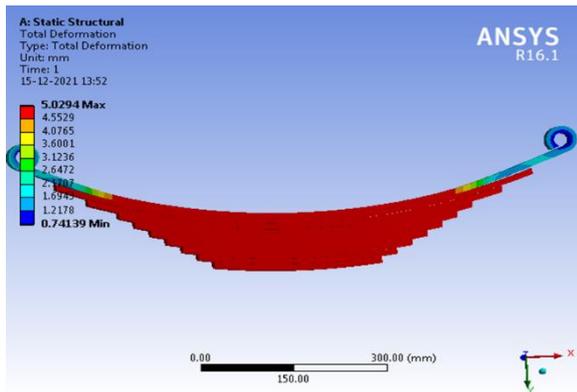


Figure 5 Total Deformation in the Stainless Steel leaf spring

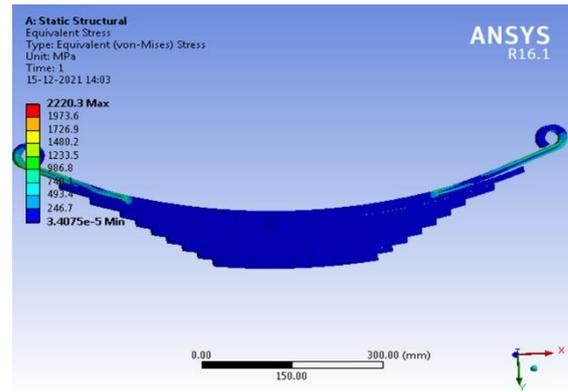


Figure 6 Equivalent stress in the Stainless Steel leaf spring

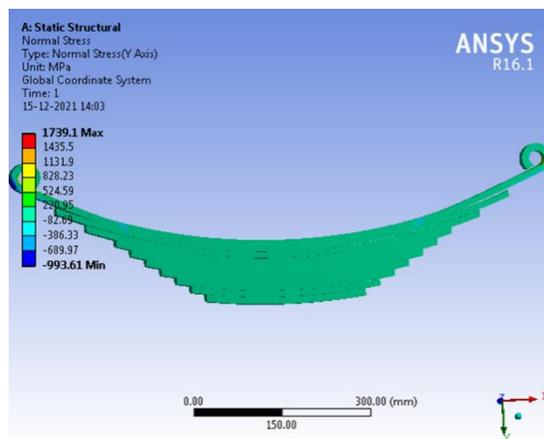


Figure 7 Normal stress in the Stainless Steel material leaf spring

Table 1 Stainless Steel leaf spring results

S. No	Characteristics	Values
1	Deformation (mm)	5.02
2	Equivalent Stress (MPa)	2220.3
3	Normal Stress (MPa)	1739.1

5. Conclusion

The following conclusions has been drawn for the finite element analysis of stainless steel. Deformation, normal stress and equivalent stress has been determined by the analysis. In the case of equivalent stress, value 2220.3MPa has been recorded. In the case of normal stress 1739.1MPa has been recorded. The total deformation 5 mm has been noted

References :

- 1 Mahmood M. Shokrieh , Davood Rezaei “ Analysis and optimization of a composite leaf spring ” Composite Structures, 60 (2003) 317–325.
- 2 E. Mahdi a, O.M.S. Alkoles a, A.M.S. Hamouda b, B.B. Sahari b, R. Yonus c, G. Goudah “ Light composite elliptic springs for vehicle suspension ” Composite Structures, 75 (2006) 24–28.
3. Shishay Amare Gebremeskel. Design, simulations, and prototyping of single composite Leaf Spring for Light Weight Vehicles. Global Journal of Researches in Engineering Mechanical and Mechanics Engineering Volume 12, Issue 7, Version 1.0, Year 2012
4. Amol Bhanage and K. Padmanabhan. Design for fatigue and simulation of Glass fiber/epoxy composite automobile leaf spring. ARPN Journal of Engineering and Applied Sciences. VOL. 9, NO. 3 MARCH 2014.
- SORATHIYA MEHUL, DHAVAL B. SHAH, VIPUL BHOJAWALA. Analysis of composite leaf spring using FEA for light vehicle mini truck. Journal for information, knowledge and research in mechanical engineering. ISSN 0975 – 668X, NOV 12 TO OCT 13, VOLUME – 02, ISSUE – 02.
6. Magdum A. Dynamic analysis of leaf spring using ANSYS. International Journal of modern Trends in Engineering and Research. 2016 Oct;3(10):51-9.
7. Pankaj Saini, Ashish Goel, Dushyant Kumar “ Design and analysis of composite leaf spring for light vehicles ” International Journal of Innovative Research in Science, Engineering and Technology Vol. 2, Issue 5, May 2013.
8. Manas Patnaik, Narendra Yadav, Ritesh Dewangan “ Study of a Parabolic Leaf Spring by Finite Element Method & Design of Experiments ” International Journal of Modern Engineering Research Vol.2, Issue 4, July-Aug 2012 pp-1920-1922 .
9. Malaga. Anil Kumar , T.N.Charyulu, Ch.Ramesh “ Design Optimization Of Leaf Spring ” International Journal of Engineering Research and Applications Vol. 2, Issue 6, November- December 2012, pp.759-765.