



Experimental Investigation of Basic Oxygen Furnace Slag (BOFS) as Fine Aggregate with Partial Replacement of Natural Sand for Use in Masonary Mortar (Review)

Ms. Anjali Yashwant Targe, Prof. J.V.Chavan

Department of Civil Engineering, Pankaj Laddhad Institute of Technology & Management Studies, Yelgaon, Buldana, (M.S), India-443001

ABSTRACT

This experimental research work investigates the possibility of utilizing Basic Oxygen Furnace Slag which was taken from Kalika Steel Industry Jalna as a sand substitute in cement mortar. The natural sands which are used in this study are local Sand. In this investigation, BOFS at 0, 25, 50, 75 replacement to natural sand for constant w/c ratio of 0.5 is considered. The work is extended to 75% replacements of natural sand with BOFS and Cement mortar mix 1:5, 1:4, 1:3 by weight were selected. The w/c ratio was taken as per standard consistency test of cement. For compressive strength test 3 samples were tested for 7, 14 and 28 days for all the replacements. The study gave comparative results for mortar compressive strength test. The experimental results obtained show that fully substitution of ordinary sand by slag gives better results in both the sands from this study it is observed that BOFS could be utilized fully as alternative construction material for natural sand in mortar applications for good compressive strength result.

Keywords: - BOFS, Compressive Strength, Workability Natural Sand.

1. Introduction

In India, natural river sand (fine aggregate) is traditionally used in mortars and concrete. However, growing environmental restrictions to the exploitation of sand from riverbeds have resulted in a search for alternative sand, particularly near the larger metropolitan areas. This has brought in severe strains on the availability of sand forcing the construction industry to look for an alternative construction material. Thus manufactured fine aggregates appear as an attractive alternative to natural fine aggregates for cement mortars and concrete. Manufactured sand is totally different from natural river sand. The surface characteristics are different. Most of the artificial sand is irregular and more porous. Grading will vary over wide range resulting in internal porosity and reduction in workability of mortar or concrete. Various types of slag from copper and steel industry are being used in mortar and concrete.

In the developing country like India, as the construction scope is increasing tremendously, therefore the demand of the materials used for the construction is also increasing. For the construction industry concrete is the most important material. For good quality of concrete cement, fine aggregate, coarse aggregate and portable water is used. And similarly in the case of mortar, the same materials are being used except coarse aggregate. The natural sand, one of the most important construction materials which are located in river beds only is being used continuously and therefore the water table level below the river bed is going down. Due to this the problems like flood, unexpected rainfall, and such natural calamities arises. So to minimize these problems we have to reduce the use of natural sand by replacing it with manufactured sand and which is Basic Oxygen Furnace Slag (BOFS).

Basic Oxygen Furnace Slag is easily and cheaply available in India. In very huge amount BOFS is disposed off from many steel and copper industries as a waste product. As production of steel industry from last 20 years is increasing therefore the production of BOFS is increasing day by day. The nature is facing the problem of land disposal and also the human beings are going through the various diseases and hence in this critical situation we must approach to use BOFS as material for mortar and concrete is very beneficial idea. And therefore in my project I am trying to utilize BOFS in compressive strength test, water absorption test and drying shrinkage test.

2. Literature Review

2.1 General

The use of sand from Natural River needs to search for an alternatives solution due to depletion of sand because of increasing demand in the larger construction industries. Hence the construction industry has to look for an alternate construction material without losing the strength of concrete. To meet the global demand of concrete in the future, it has become a most important job to find sustainable ways of construction. Sustainable construction means to reduce the negative environmental impacts generated by construction industry. The rapid growth of industrialization leads to various kinds of wastes generation which are very dangerous to our environment. Granulated oxygen furnace slags are one of the best sustainable solutions as they are obtained as solid wastes generated by industry. Hence it reduces the solid waste disposal problem and other environmental issues.

2.2 Literature Review:

Ionut-Ovidiu Tomaa, George Taranua, Ana-Maria Tomaa, Mihai Budescua* “The present paper brings its contribution to the investigation on the use of a new binder, in the form of anhydrous calcium sulphate, as partial replacement of the ordinary Portland cement in concrete. The eco-binder is obtained exclusively from industrial wastes and can be entirely recycled after its expiration date. The results obtained so far show a decrease in the flexural and compressive strengths of mortars with small replacing percentages of anhydrous calcium sulphate. However, the flexural strength increases tremendously for higher percentages of anhydrous calcium sulphate. Slight gains in the values of the compressive strength were also observed for the considered specimens.”[1]

L. Baali, A. Naceri, Z. Rahmouni, M.W. NouiMehidi* “This experimental study investigates the possibility to make a mortar with a ternary sand (natural and artificial fine aggregates). This method is utilized to correct the particle size distribution of various sands used in mortar. For this investigation, three sands have been used: dune sand (DS), a slag sand (SS), and brick sand (BS) at Different proportions in mortar. The results obtained show that the mechanical strength on mortar depends of the nature and particle size distribution of sand studied. The reuse of this recycled material (slag blast furnace and waste brick) in the industry would contribute to the protection of the environment. This study shows the potential of this method to make mortar with ternary sand (natural and artificial fine aggregates) in order to improve the physical properties of sand. Utilizing natural and artificial fine aggregates to produce quality mortar should yield significant environmental benefits.”[2]

Mohammed Nadeem1, Dr. A. D. Pofale2 “This paper highlights upon the feasibility study for the utilization of granular slag as replacement of natural fine aggregate in construction applications (Masonry & plastering). In this investigation, cement mortar mixes 1:3, 1:4, 1:5 & 1:6 by volume were selected for 0, 25, 50, 75 % replacements of natural sand with granular slag for w/c ratios of 0.60, 0.65, 0.70 & 0.72 respectively. The study gave comparative results for mortar flow behaviors, compressive & split tensile strengths, brick mortar crushing & pulls strengths and their co-relations. The study comprises of The experimental results obtained show that partial substitution of ordinary sand by slag gives better results in both the applications i.e. masonry & plastering. The sand replacement from 50 to 75% improved mortar flow properties by 7%, the compressive strength improved by 11 to 15 % for the replacement level from 25 to 75%. At the same time brick mortar crushing & pull strengths improved by 10 to 13% at 50 to 75% replacement levels. The co-relation between mortar compressive/split tensile strengths & brick crushing/pull strengths shows linear dependencies on each others. The study concluded that granular could be utilized as alternative construction material for natural sand in masonry & plastering applications either partially or fully.”[3]

Ansu John and Elson John “This paper highlights the feasibility study on the utilization of induction furnace slag as an alternative for conventional fine aggregate. In this study the compressive strength characteristics of mortar and concrete made with partial replacement of fine aggregate using induction furnace slag was considered. For the experimental investigation, mixes were prepared with fine aggregate replacement using 20 percent, 30 percent, 40 percent, 50 percent and 60 percent induction furnace slag. Compressive strength test on mortar and concrete were conducted and the test results indicated that fine aggregate replacement using 30 percent induction furnace showed a better performance compared to control mix.”[4]

G. D. Ransinchung R. N.1 and Brind Kumar2 “In this study, investigations were made on pastes and mortars to evaluate its potential as a new material for admixing with ordinary portland cement with or without Microsilica. Several cementitious mix proportions of ordinary portland cement, wollastonite, and microsilica were investigated for normal consistency, initial and final setting time of paste, and compressive strength of mortar.”[5]

3. Introduction of Mortar

Mortar is a homogeneous mixture, produced by intimately mixing cementations materials, water and inert materials, such as sand, for use in binding together the masonry units. The purpose of mortar is to bond masonry units to produce a continuous load bearing element which will provide protection from wind and rain. In order to perform for an adequate period, generally the order of decades, and the mortar must be formed of durable materials; the requirements of a mortar can be complex in that it has to satisfy one range of parameters when plastic and a further set of parameters when hardened.

In the plastic state, mortar must be workable in order to enable the bricklayer to spread the material easily and of a consistency for it to adhere but not stiffen too rapidly. In the hardened state, mortar must provide a degree of resistance to rain penetration, be frost resistant & contribute to the strength of the masonry.

A. Classification of mortar

- Mortars could be broadly classified as:-

- Cement mortars,
- Lime mortars and
- Cement lime mortars

4. Methodology

The Compressive strength of masonry mortar which was casted cured & tested as Per "IS: 2250-1981 Code of practice for preparation and use of masonry mortars."

A. Preparation of Cement Mortar

- Specimen and Moulds - The test specimens shall be cubes of size 70.6 mm × 70.6 mm × 70.6 mm.
- Tamping Rod - A metal bar 25 mm square and 200 mm long Trowel - This shall have a steel blade 100 to 150 mm length with straight edges.

Curing and Storage of Test Specimens

The specimen shall be tested immediately on removal from the curing water in which it has been stored and while it is still in a wet condition. Any loose material shall be removed from the sides of the specimen. The dimensions of the specimen shall be noted before testing. The bearing surfaces of the testing machine shall be wiped clean and the specimen shall be placed in the machine in such a manner that the load shall be applied to opposite sides of the cube as cast, that is, not to the top and bottom.

The load on the specimen shall be applied without shock and at a uniform rate of 2 N/mm² to 6 N/mm² per minute until failure occurs. The maximum load at failure shall be noted.

B. Calculation A-7.1

The compressive strength shall be calculated as follows: Compressive strength (N/mm²) = Maximum load at failure (N) / Cross-sectional area (mm²)
The individual results shall be calculated to the nearest 0.05 N/mm²

The average of all the determinations shall be reported.

TEST PERFORMED ON MORTAR

A. Compressive Strength

Compressive Strength Test was done as per IS 2250-1981 on test specimen of 70.6 mm x 70.6 mm x 70.6 mm and 3 samples were tested for 7, 14, 28 days of curing.

5. Result

Sr. No.	Mix Proportion	Percent replacement	Curing Days	Compressive Strength in N/mm ²
1.	01:05	0	7	6.841368
			14	9.081816
			28	10.4821
		25	7	6.55
			14	9.46
			28	12.28
		50	7	6.98
			14	9.02
			28	13.07
	75	7	8.39	
		14	9.44	
		28	14.18	
2.	01:04	0	7	8.59

			14	13.24
			28	14.16
		25	7	9.72
			14	13.22
			28	15.50
		50	7	13.01
			14	14.26
			28	20.72
		75	7	16.58
			14	18.26
			28	23.46
3.	01:03	0	7	17.96
			14	17.35
			28	26.21
		25	7	19.20
			14	20.60
			28	28.56
		50	7	18.73
			14	21.67
			28	29.33
		75	7	20.21
			14	21.01
			28	30.55

3. Graphical Representation of Results

The result for the compressive strength of 1:5 is shown below.

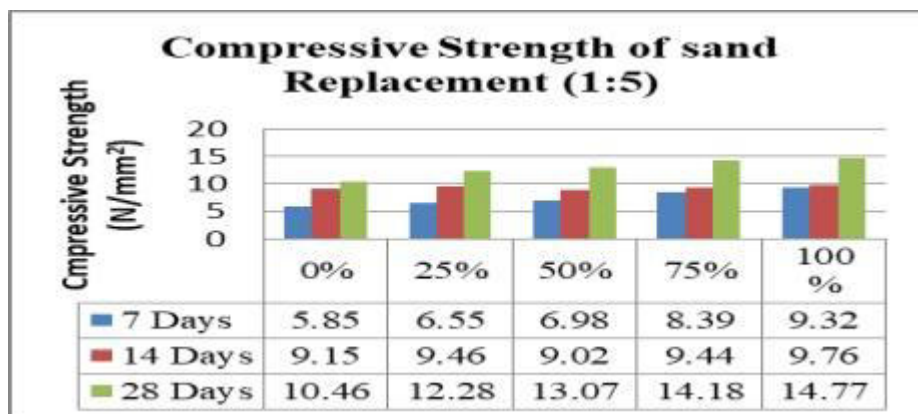


Fig. 1: The result for the compressive strength of 1:5 the result for the compressive strength of 1:4 is shown below.

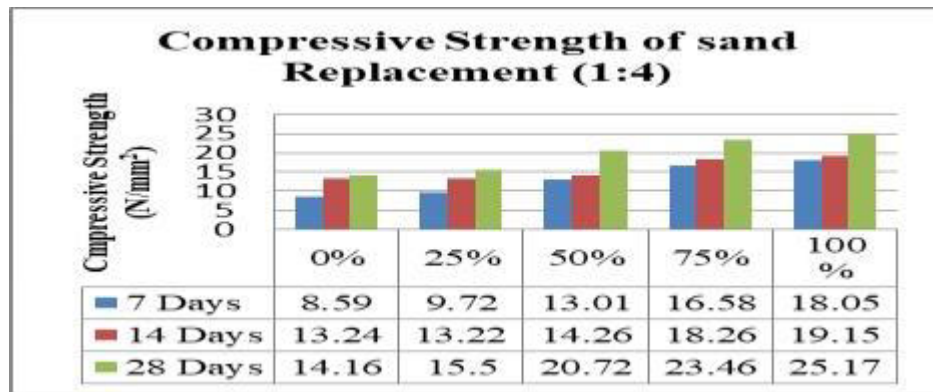


Fig. 2: The result for the compressive strength of 1:4 the result for the compressive strength of 1:3 is shown below.

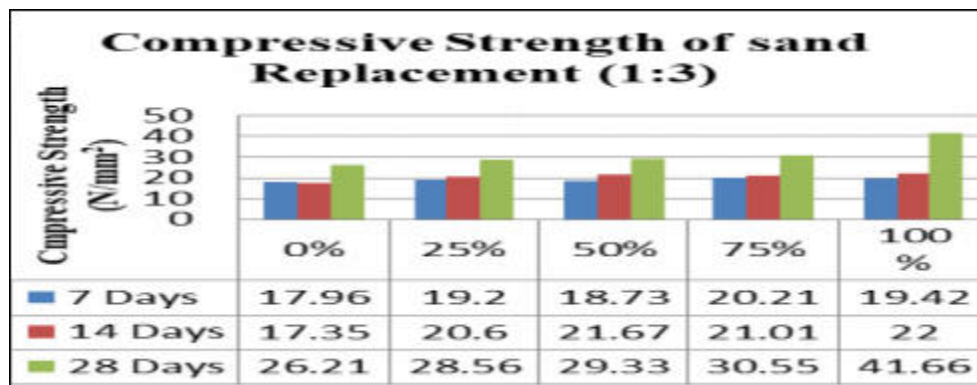


Fig. 3: The result for the compressive strength of 1:3

6. Conclusions

The following conclusions can be drawn based on the results obtained in the ETABS software.

1. The data obtained shows that the compressive strength of cement mortar increases as the replacement level of BOFS increases.
2. This trend is true for all ages of testing.
3. From this it is clear that BOFS can be used as an alternative to natural sand from the point of view of strength.
4. Use of BOFS up to 75% can be recommended.
5. The study comprises of the experimental results obtained show that fully substitution of ordinary sand by slag gives better results.
6. It is also observed that the flow of mortar decreases as the percentage of BOFS increases.
7. As the sand is artificial, its long term performance from the point of view of durability is very important and further studies in this direction is in progress.

Future Scope

1. In this investigation, at 75% BOFS replacement the mix gives maximum strength. But we have not tested the chemical properties of BOFS and therefore the chemical reaction of cement with BOFS is the part of investigation.
2. Further investigation is needed when the BOFS is available in different shapes.
3. It is free of cost in any steel industry.
4. All knowledge shows that BOFS is best replacement of natural sand. And its help that to maintained water level of nature.
5. Using of BOFS in reducing the environment pollution during the storage of BOFS.

References

- [1] Ionut-Ovidiu Tomaa*, George Taranua, Ana-Maria Tomaa, Mihai Budescua. "Influence of cement and sand type on the strength characteristics of mortars with various contents of green binder."
- [2] L. Baali, A. Naceri*, Z. Rahmouni, M.W. Noui Mehidi. "Experimental Study of the Possibility to Make a Mortar with Ternary Sand (Natural and Artificial Fine Aggregates)."
- [3] Mohammed Nadeem1, Dr. A. D. Pofale2. "Replacement of Natural Fine Aggregate with Granular Slag - A Waste Industrial By-Product in Cement Mortar Applications as an Alternative Construction Materials."
- [4] Ansu John and Elson John "Study on the partial replacement of fine aggregate using induction furnace slag."
- [5] G. D. Ransinchung R. N.1 and Brind Kumar2. "Investigations on Pastes and Mortars of Ordinary Portland Cement Admixed with Wollastonite and Microsilica".
- [6] M. Shariq*, J. Prasad and A.K. Ahuja *Department of Civil Engineering, IIT Roorkee, India*. "Strength development of cement mortar and Concrete incorporating ggbs" M. Shariq*, J. Prasad and A.K. Ahuja *Department of Civil Engineering, IIT Roorkee, India*.
- [7] S.A. Abo-El-Eneina, A.H. Ali b, Fatma N. Talkhanc, H.A. Abdel-Gawwadb. (April 2013 HBRC) "Application of microbial biocementation to improve the physico-mechanical properties of cement mortar"
- [8] "Compressive Strength and Expansion of Blended Cement Mortar Containing Palm Oil Fuel Ash". Weerachart Tangchirapat1; Chai Jaturapitakkul2; and Kraiwood Kiattikomol3.