



Finite Element Analysis of Wind Turbine Tower by using Concrete Material

Rahul Sharma¹, L Boriwal²

¹,PG Student, Department of Mechanical Engineering, Sagar Institute of Research & Technology Indore, India

²Associate Professor, Department of Mechanical Engineering, Sagar Institute of Research & Technology Indore, India

ABSTRACT

The present work purposed to analyse the concrete material of wind turbine using Static Structural Analysis through Finite Element Modelling (FEM) Method using Ansys Workbench. Wind Turbine Towers are assumed to be cantilever beam which is fixed at the base and free to deflect at the top of the tower with uniformly varying cross-section along the height of the tower. The simulation results are then validated with the analytical results (using Simple Bending Equation) from directional deformation and bending stress. For the design of the Steel Tubular Tower with 80 meters hub height, base diameter is assumed to be the design parameter for the wind turbine tower. Finally, results from directional deformation and bending stress have extrapolated for higher wind turbine tower (120 meters and 150 meters).

Keywords: Concrete material, wind tower, finite element analysis

1 Introduction

Depending on the form of energy they supply, the classification of the energy sources as: Primary energy encompasses the forms of energy that are directly consumed as they are found in nature, without any processing. The various forms of coal, crude oil, natural gas, hydraulic energy and passive solar energy are among these forms, Secondary energy forms are used by the consumers in a refined, processed form. The liquid petroleum products derived from crude oil, such as gasoline, diesel and kerosene; fuel from biomass; biodiesel; solar collector energy; and thermal geothermal are among the secondary energy forms and Tertiary energy forms involve one or more transformations of energy. Electric energy, in any way it is produced, is a tertiary form of energy. Nuclear energy, wind power and most of the other renewable energy sources when they are used to produce electricity contribute to the supply of tertiary energy. Secondary and tertiary forms of energy must be produced from primary sources. The main primary energy sources that have satisfied the global energy demand since 1970 are shown in figure 1.1. These primary sources are classified as: a) The various forms of coal (anthracite, bituminous, lignite, peat), b) Crude oil/petroleum, c) Natural gas, d) Nuclear, e) Hydroelectric energy or water energy, f) Biomass and waste, which primarily comprises trees, and g) Other renewable forms such as solar, wind and geothermal.

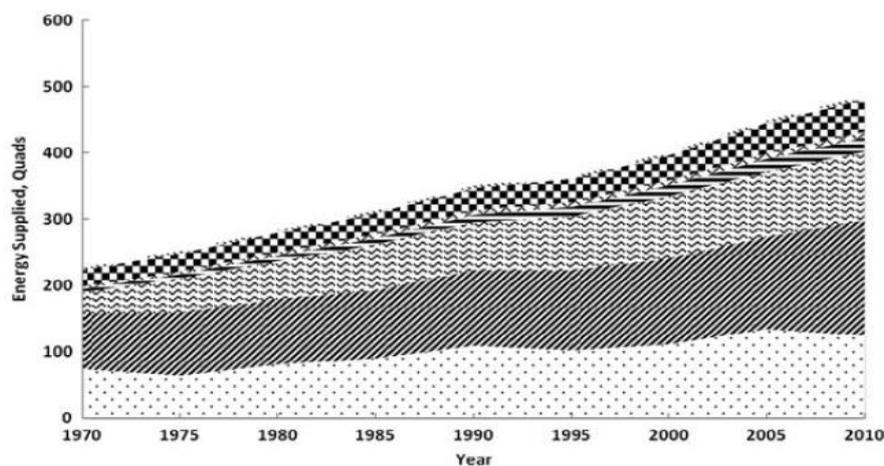


Figure 1: The primary energy sources that supplied the global demand between 1970 and 2010

A case in point: If in 2008 the United States would have produced 50% of its electric power from nuclear energy, instead of approximately 25% it actually produced, the country would have exceeded by 150% its quota from the Kyoto Protocol without any other changes in the rest of its energy mix.

Other OECD countries, such as France and Japan produce more than 70% of their electricity from nuclear power plants. The underlying principles that govern the release of nuclear energy is the theory of energy obtained from nuclear reactions is the famous Einstein equation. The height of the wind turbine is become an important parameter for the safe, economic (costs up to 30% of the overall cost of the wind turbine) and efficient design of the towers. The present work includes the complete of wind turbine tower structure under buckling and bending load at a hub height of 80 meters for structured steel, Aluminium, Stainless Steel material.

Chikako Fujiyama et al. (2014) [12] studied the vibration response of the wind turbine tower–foundation system to rectify and describe the stress state of the system. First, the movements of an existing wind turbine tower foundation using accelerometers at the top and middle of a 20 m tower. Elastic behaviours of the tower and anchor bolts that transfer motion to its foundation were verified using various strain gauges by using three-dimensional nonlinear FE analysis.

LanhuiGuo et al. (2013) [13] studied the behaviour of thin-walled steel circular hollow sections (CHSs) which are widely used in wind turbine towers and are subjected to bending mainly. In this, sixteen bending tests were performed up to failure on different sizes of CHS with the diameter-to-thickness ratio (D/t) varying from 75 to 300 using a standard universal torsion testing machine. It has found that the specimens with small diameter-to-thickness ratios failed by extensive plastification on the central part of the tube. With the increase of the diameter-to-thickness ratio, the local buckling



Figure 2: Wind turbine towers with circular hollow section [13]



Figure 3 Design of hybrid towers [10]

Mingyang Li et.al. (2020) [17] with the increasing popularity of wind energy, offshore wind turbines (OWTs) are currently experiencing rapid development. However, the tower will not only stand its own weight and weight of the top structure, but also be surrounded by harsh wave and wind loading conditions. Therefore, it is necessary to apply a structural health monitoring (SHM) system to monitor the health condition of the OWT towers in real-time. The total displacements and von Mises stresses obtained from iFEM analysis are compared against reference results and optimum sensor locations are determined

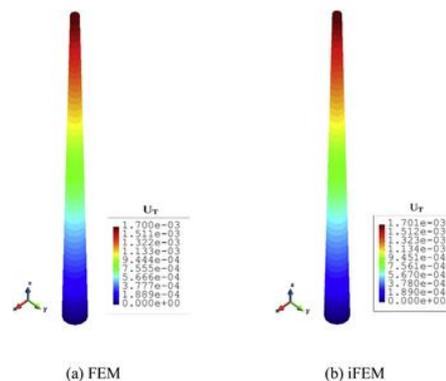


Figure 3 Contour plot of UT (unit: m) for static condition [17]

2. Modelling of wind tower

Problems on structure can be solved by using finite element computational analysis under the module of Ansys popularly known as Static Structural Analysis. The solution of structural problem in the module of static structural analysis is performed in steps. Firstly, the engineering data i.e. the properties of material like density, Young's modulus of elasticity, Poisson's ratio, etc. are considered for the material. After this, geometries were prepared in static structure design modular followed by mesh generation. The direction of the wind in the atmosphere is not certain. Therefore, in this case first the prevailing direction of the wind is determined with the help of commonly used method. The wind rose is a diagram which shows the

percentage of wind blowing from each of the leading 12 points in compass and also shows the prevailing direction of the wind i.e. the direction of the wind blow most of the time. In this present work, wind turbine tower is assumed to be subjected horizontal wind shear and therefore it is important to know the prevailing wind direction. In the present analysis, +X-direction is assumed to be the prevailing direction of the wind i.e. it is assumed that the wind is blowing from east to west direction and all the loads are applied in +X-direction. Therefore, results such as direction deformation, bending stress are calculated in +X-direction. Geometry for the steel tubular tower, structured steel tower and aluminum based material tower is considered.

2.1 Geometry of wind turbine tower for concrete material

The considered dimension for a wind turbine tubular tower for a hub height of 80 m. Based on this, the geometry for tubular tower with 80 meters hub height has been prepared on static structural design modular of Ansys (material considered is the grades of structured steel) shown in figure 4. The properties for structured steel material is discussed in the further chapters.

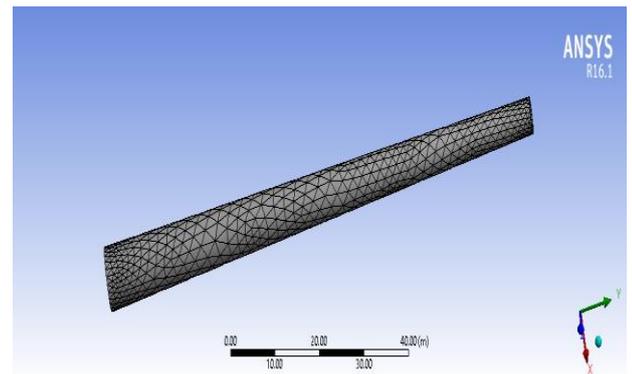
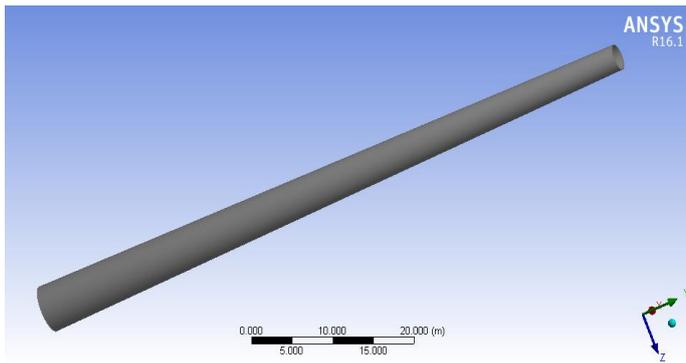


Figure 4 Isometric view of wind turbine tower Figure 5: Mesh generation for concrete based wind turbine tower

The wind shear for concrete material is obtained with this. Now, this value of wind shear is assumed to be subjected on the structure of wind turbine tower. The variation of directional deformation on wind turbine tower has shown below.

3. Results and Discussion

3.1 Directional deformation of wind turbine tower

The wind shear (horizontal wind load) has been calculated for the grades of structured steel material S235, S275, S355, S450 and concrete based wind turbine tower. This value of the wind shear is assumed to be subjected on the entire surface of the wind turbine tower and this causes a directional deformation on the tower in the applied direction of load. The variation of directional deformation on wind turbine tower has shown below

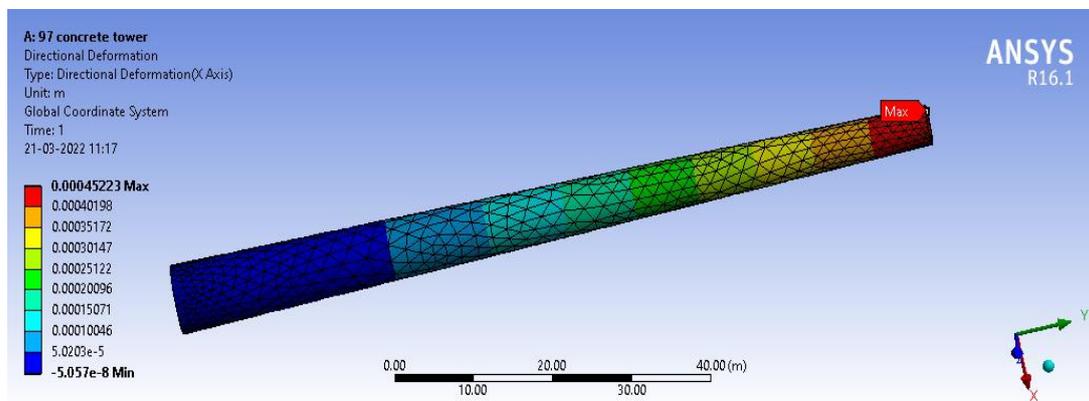


Figure 6 Contour of directional deformation for concrete material

4. Conclusions

The maximum values of directional deformation and bending stress on concrete material based on numerical simulations matched well with that from the analytical approach. Thus, finite element method could be used for the design purpose of quick calculation of directional deformation and bending stress on wind turbine tower.

Directional deformation and bending stress on the wind turbine tower (for the considered materials) increases as wind pressure increases with hub height.

Directional deformation for all the cases of considered material is found maximum at the top of the wind turbine tower and minimum at the base of the wind turbine.

References :

- [1] Madubuko CF, Akuru UB. Future Trends on Global Energy Demand. ES4PG-2013 conference Proceedings.
- [2] Michaelides EE. Alternative energy sources. Springer Science & Business Media; 2012 Jan 16.
- [3] Letcher TM. Future energy: improved, sustainable and clean options for our planet. 2nd ed. London: Elsevier; 2014.
- [4] The report of key world energy statistics, 2020
- [5] Global Energy Transition Statistics, Access 2020 world energy data.
- [6] The World energy and climate data report 2020
- [7] The Global wind energy council GWEC 2021.
- [8] Letcher TM. Wind energy engineering: A handbook for onshore and offshore wind turbines. Academic Press; 2017 May 11.
- [9] Jay A, Myers A. Design of Conical Steel Wind Turbine Towers Manufactured with Automated Spiral Welding. InStructures Congress 2014 2014 (pp. 1675-1683).
- [10] Das A. Modelling and Analysis of Lattice Towers for Wind Turbines. International Journal of Science and Research. 2015;4(4):999-1003.
- [11] Alvarez-Anton L, Koob M, Diaz J, Minnert J. Optimization of a hybrid tower for Onshore wind turbines by Building Information Modeling and prefabrication techniques. Visualization in Engineering. 2016 Jan 8; 4(1).
- [12] Ma H, Meng R. Optimization design of prestressed concrete wind-turbine tower, Science China Technological Sciences. 2014 Feb 1; 57(2):414-22.
- [13] Fujiyama C, Yonetsu K, Maeshima T, Koda Y. Identifiable stress state of wind turbine tower-foundation system based on field measurement and FE analysis. Procedia Engineering. 2014 Jan 1; 95:279.
- [14] Guo L, Yang S, Jiao H. Behaviour of thin-walled circular hollow section tubes subjected to bending. Thin-Walled Structures. 2013 Dec 31;73:281-9.
- [15] Fu B, Zhao J, Li B, Yao J, Teifouet AR, Sun L, Wang Z. Fatigue reliability analysis of wind turbine tower under random wind load. Structural Safety. 2020 Nov 1;87:101982.
- [16] Feliciano J, Cortina G, Spear A, Calaf M. Generalized analytical displacement model for wind turbine towers under aerodynamic loading. Journal of Wind Engineering and Industrial Aerodynamics. 2018 May 1;176:120-30.
- [17] Stavridou N, Efthymiou E, Baniotopoulos CC. Welded connections of wind turbine towers under fatigue loading: Finite element analysis and comparative study. American Journal of Engineering and Applied Sciences. 2015 Aug 18;8(4):489-503.
- [18] Li M, Kefal A, Oterkus E, Oterkus S. Structural health monitoring of an offshore wind turbine tower using iFEM methodology. Ocean Engineering. 2020 May 15;204:107291.
- [19] Lavassas I, Nikolaidis G, Zervas P, Efthymiou E, Doudoumis IN, Baniotopoulos CC. Analysis and design of the prototype of a steel 1-MW wind turbine tower. Engineering structures. 2003 Jul 1;25(8):1097-106.
- [20] Wang L, Ishihara T. A study of the effects of foundation uplift on the seismic loading of wind turbine tower and shallow foundation using a new dynamic Winkler model. Engineering Structures. 2020 Sep 15;219:110745.
- [21] Gücüyen E. Analysis of offshore wind turbine tower under environmental loads. Ships and Offshore Structures. 2017 May 19;12(4):513-20.
- [22] Uys PE, Farkas J, Jarmai K, Van Tonder F. Optimisation of a steel tower for a wind turbine structure. Engineering structures. 2007 Jul 1;29(7):1337-42.
- [23] Chou JS, Tu WT. Failure analysis and risk management of a collapsed large wind turbine tower. Engineering Failure Analysis. 2011 Jan 1;18(1):295-313.
- [24] Yoshida S. Wind turbine tower optimization method using a genetic algorithm. Wind Engineering. 2006 Dec;30(6):453-69.6.Koilraj M, Sundareswaran V, Vijayan S, Rao SK. Friction stir welding of dissimilar aluminum alloys AA2219 to AA5083–Optimization of process parameters using Taguchi technique. Materials & Design. 2012 Dec 1;42:1-7.
- 7.Boriwal L, Sarviya RM, Mahapatra MM. Process analysis and regression modelling of resistance spot welded joints of austenitic stainless steel 304L and low carbon steel sheets by using surface response methodology. Proceedings of the Institution of Mechanical Engineers, Part E: Journal of Process Mechanical Engineering. 2021 Feb;235(1):24-33.
- 8.Boriwal L, Sarviya RM, Mahapatra MM. Failure modes of spot welds in quasi–static tensile–shear loading of coated steel sheets. Materials Today: Proceedings. 2017 Jan 1;4(2):3672-7.
- 9.Boriwal L, Sarviya RM, Mahapatra MM. Optimization of weld bonding process parameters of austenitic stainless steel 304L and low carbon steel sheet dissimilar joints. Journal of adhesion science and Technology. 2017 Jul 18;31(14):1591-616.
- 10.Boriwal L, Sarviya RM, Mahapatra MM. Modeling the resistance spot welding of galvanized steel sheets using Neuro-Fuzzy Method. InInternational Proceedings on Advances in Soft Computing, Intelligent Systems and Applications 2018 (pp. 37-50). Springer, Singapore.