



CFD Analysis of a Blended Body Aircraft

Dr. Shabana Naaz Siddique¹, Mohammad Faizan², Mohit Duggad³, Pushkar Dubey⁴, Anjali Meshram⁵

¹Associate professor, Department of Mechanical Engineering, Bhilai Institute of Technology, Durg, Chhattisgarh, India

^{2,3,4,5} Undergraduate Student, Department of Mechanical Engineering, Bhilai Institute Of Technology Durg, Chhattisgarh, India

ABSTRACT

Flying airplanes to high altitudes requires high lift, which can be achieved by better design, increased wingspan and reduced drag. Aircraft with BWB or Blended wing body suit the need to fly at high altitudes and have better stealth properties (avoiding RADAR detection) due to their triangular shape. This study is related to the investigation of a concept airplane by changing the design parameters using CFD software results. The mixed body aircraft CAD model is developed in Creo design software and CFD simulation is performed using ANSYS CFX. The values of aerodynamic force, lift force and pressure are determined for 2 aircraft with different taper ratios and different angles of attack. A low angle of attack angle of attack is found to be 180 and a high bank angle of attack if the angle of attack is found to be 150. Vortex formation was noted at the rear of the aircraft.

I. INTRODUCTION

An airplane is controlled by the forces acting on it. These forces are lift force, braking force, weight and thrust.

The wing profile affects the overall aerodynamics of the aircraft, see landing/takeoff, stall, cruise speed Fig. 2: Airfoil camber is the curvature of the airfoil. "Mean camber line" is a line equidistant from the top and bottom surfaces. The overall airfoil is the maximum distance of the center deflection from the chord line, expressed as a percentage of the chord. The profile thickness distribution is the distance from the top surface to the bottom surface, measured perpendicular to the camber centerline, and is a function of the distance from the leading edge. "Airfoil Thickness Ratio" (tic) refers to the maximum airfoil thickness divided by its chord.

Lift is generated by the passage of different velocities of air above and below it. The angle of attack of the airfoil causes the wind to flow quickly over it and then under the airfoil. 5 Bernoulli's equation shows that higher speeds produce lower pressures, so the upper airfoil surface tends to be pulled up by lower-than-ambient pressures, while the lower airfoil surface tends to be pushed up by higher-than-ambient pressures. The pressure difference between the top and bottom of the airfoil generates the lifting force. Pressure distribution for the upper and lower surfaces of the airfoil at subsonic speeds.

The entire surface of the wing, both upper and lower, is affected by the air flow. The downforce acts throughout the wing, which provides the lift of the wing. The arrows in the diagram show how lift forces might appear on a typical wing in normal level flight

Wing design parameter

Aircraft design includes various design parameters. For this study, our study will focus on the design of the delta wing of our aircraft while maintaining constant parameters of the other bodies of the aircraft.

Giant. 1: Wing design parameters

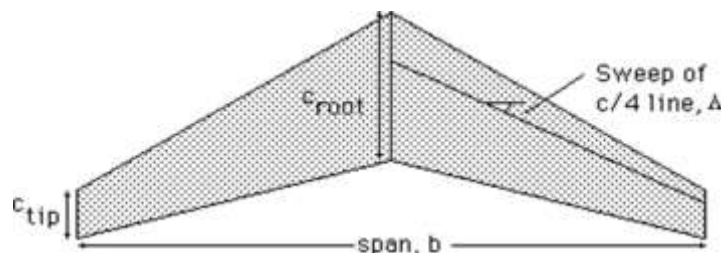


Fig 1: Wing Design Parameter

II. LITERATURE REVIEW

Adam Kosík [1] presented CFD calculations with the help of ANSA and OpenFOAM. All results presented were generated to simulate fluid flow around a twin-engine turboprop EV-55 Outback. The main objectives were to control the aerodynamic characteristics of the aircraft. Flow simulations are obtained from the OpenFOAM package.

Zoran A. Stefanović [2] used a CFD code that is used for the analysis of new light aircraft in different phases of flight. Different calculations and methods for new light aircraft are developed for different flight phases and compares the results obtained by them to verify the results obtained from the simulations. Comparison of lift/drag forces was done for angle of attack at 0 and 300.

S. Rajiv Rao[3] worked on the vertical take-off and landing model of the V-22 Sprey tilt-rotor aircraft using CFD techniques. Studies have been conducted at various angles of attack from 0 to 20 degrees and the lift coefficient and drag coefficient are calculated for each angle of attack. The values of CL & Cd increase with the angle of attack up to 60, beyond which these coefficients change abruptly.

Abhishek Patil [4] calculated the 3D turbulent flow field over sharp-edged finials with rhomboidal planforms and a moderate pitch angle. The braking force and lift force were analyzed at different angles of attack of 0,4,8,12 degrees and the aerodynamic properties were predicted, viz. pressure distribution, skin friction distribution, flow and Cl values of the biconvex delta wing cross section.

Karna S. Patel et al.[5] studied a CFD analysis of the flow over a NACA 0012 airfoil and concluded that no lift is produced at zero degree AOA. The magnitude of the aerodynamic force and the value of the drag coefficient are also increased, but the magnitude of the increment of the aerodynamic force and the drag coefficient is quite lower compared to the lift force.

Toshihiro Ikeda et al. [6], studied experimentally and numerically that the BWB configuration has better flight performance due to a higher lift-to-drag (L/D) ratio and could improve existing conventional aircraft in the areas of noise emissions, fuel consumption and Direct Operating Cost (DOC) per service. However, the BWB configuration must use a new structural system for passenger safety procedures such as passenger boarding/disembarking. The favorable results of the BWB design were that the drag of the parasite was reduced and the body with the span as a whole could generate lift.

Thomas A. Reist and David W. Zinggy et al. [7], numerically studied that an elliptical lift distribution is achieved on the wing, shocks are eliminated and large areas of highly separated flow on the base structure are greatly reduced. These drag reductions are achieved by trimming and stabilizing the basic design.

Luis Ayuso Moreno, Rodolfo Sant Palma and Luis Plágaro Pascual et al. [8], in an experimental and numerical study compared the performance and operational problems of the latest generation of conventional very large aircraft. The results are very encouraging and predict about a 20 percent increase in the efficiency of transportation productivity, without the burden of new or aggravated safety or operational problems.

Kai Lehmkuehler, KC Wong and Dries Verstraete et al. [9], experimentally studied that a design methodology using fast panel methods proved to be viable for an unusual configuration. Wind tunnel tests matched predicted data well and flight tests revealed good handling characteristics in flight. Some take-off and landing problems remain due to the limited stability of the aircraft and the presence of propulsion effects on longitudinal stability. Improved induced drag properties and remaining stability issues.

R. H. Liebeck et al. [10], studied 800-passenger BWB aircraft and conventional configurations were sized and compared for a design range of 7000 n mil. The results showed a remarkable 14 improvement in BWB performance over the conventional baseline, including a 15% reduction in takeoff weight

Harijono Djojodihardjo and Alvin Kek Leong Wei et al. [11], studied and concluded that aerodynamically, the BWB is much better than conventional aircraft as it has at least a 20% higher "lift-to-drag ratio" because a single body produces uniform lift and no other surfaces are attached to the body, reducing skin friction pulls considerably.

Akash Sharma, Tejas Alva et al. [12], numerically analyzed the flow over the surface of a 2-D Blended Wing Body for a given set of boundary conditions, and the obtained results safely meet the theoretical standards.

OUTCOMES FROM LITERATURE REVIEW

Flying airplanes to high altitudes requires high lift, which can be achieved by better design, increased wingspan and reduced drag. Airplanes with BWB or Blended wing body meet the need to fly at high altitudes and have better stealth characteristics (avoiding RADAR detection) due to their triangular shape.

The hypothesis proved to be correct as the drag force continued to increase and eventually the lift force began to decrease to zero. However, research has shown that the critical angle of attack should be about fifteen degrees

In general, the taper causes a reduction in drag (most effective at high speeds) and an increase in lift. There is also a design advantage due to the weight savings of the wing.

CAUSES OF LOW LOFT:

1 Due to the smaller wingspan

2. Reduce engine thrust.
3. Construction and shape of the wing.
4. Air density.
5. Air temperature.
6. Higher payload.
7. Due to poor choice of material.
8. Corrosion and fatigue

OBJECTIVE:

1. Understand aircraft design and development.
2. Study the current design of the aircraft and its parameters.
3. Get a model airplane.
4. Understand the change made to the aircraft and its logic.
5. Editing the model's bevel ratio and aspect ratio.
6. Calculation and FVM analysis.
7. Completing the change.

III. SCOPE OF PROJECT

This study is related to the research of the concept airplane according to the changing design parameters using CFD software the result

1. Concept aircraft modeling in Creo Software.
2. Aircraft analysis in ANSYS software.
3. Pressure graph using ANSYS software.
4. Determination of the graph of lift vs angle of attack.
5. Determination of the graph of resistance vs angle of attack.
6. Changing taper ratio
7. Study of vorticity

IV. REFERENCE

- [1] Adam Kosík Evector s.r.o., Czech Republic "THE CFD SIMULATION OF THE FLOW AROUND THE AIRCRAFT USING OPENFOAM AND ANSA" 5 th ANSA & μETA International Conference
- [2] Ivan A. Kostić , Zoran A. Stefanović, Olivera P. Kostić "Aerodynamic Analysis of a Light Aircraft at Different Design Stages "FME Transactions (2014) 42, 94-105
- [3] S. Rajiv Rao1, Vajrala Bhargavi , Sarla Srinath, Bharathraj Reddy Dere "Analysis of Vertical Take - off & Landing Aircraft using CFD (" IJERT ISSN: 2278-0181 IJERTV3IS090267 Vol. 3 Issue 9, September- 2014
- [4] Abhishek Patil ,Piloo Raghu Kumar, Aditya Kodkani and Sekhar Majumdar "CFD ANALYSIS OF LOW SPEED TURBULENT FLOW PAST A DELTA WING " IJRAME Vol.2 Issue.11, November 2014.
- [5] Karna S. Patel, Saumil B. Patel, Utsav B. Patel, Prof. Ankit P. Ahuja "CFD Analysis of an Aerofoil" International Journal of Engineering Research Volume No.3, Issue No.3, pp : 154-158, ISSN:2319-6890(online),2347- 5013(print) 01 March 2014
- [6] Toshihiro Ikeda "Aerodynamic Analysis of a Blended-Wing-Body Aircraft Configuration" RMIT University. March 2006
- [7] Thomas A. Reist and David W. Zinggy "Aerodynamic Shape Optimization of a Blended-Wing-Body Regional Transport for a Short Range Mission" 31st AIAA Applied Aerodynamics Conference. June 24-27, 2013, San Diego, CA.

-
- [8] Luis Ayuso Moreno, Rodolfo Sant Palma and Luis Plágaro Pascual “aerodynamic study of a blended wing body; comparison with a conventional transport airplane” ICAS 2006.
- [9] Kai Lehmkuehler, KC Wong and Dries Verstraete “design and test of a UAV blended wing body configuration”
- [10] R. H. Liebeck “Design of the Blended Wing Body Subsonic Transport” Journal of Aircraft Vol. 41, No. 1, January–February 2004
- [11] Harijono Djojodihardjo and Alvin Kek Leong Wei “Conceptual Design and Aerodynamic Study of Blended Wing Body Business Jet” ICAS 2012.
- [12] Akash Sharma, Tejas Alva and Srinivas G “Flow Analysis of Blended Wing Body (BWB) Using CFD Technique” Journal of Basic and Applied Engineering Research (JBAER), Print ISSN: 2350-0077, Online ISSN: 2350-0255