



Enhanced State Estimation of Lithium-Ion Batteries Using LSTM Networks for Electric Vehicle Applications

*Happy Dabla*¹, *Balwant Singh Kuldeep*²

¹M. Tech Scholar, Department of Electrical Engineering, Sri Balaji college of engineering and technology, Jaipur, India

²Assistant Professor, Department of Electrical Engineering, Sri Balaji college of engineering and technology, Jaipur, India

Emails: balwant047@gmail.com, happydabla07@gmail.com

ABSTRACT

This paper examines the application of machine learning techniques in estimating the State of Charge (SoC), State of Health (SoH), and State of Function (SoF) of lithium-ion batteries, which are crucial for the effective monitoring and management of battery systems in electric vehicles (EVs). Utilizing Long Short-Term Memory (LSTM) networks, the study leverages advanced data preprocessing methods within the Python environment to enhance model performance. These preprocessing steps include handling missing values, normalizing data, and adjusting it for LSTM compatibility, supported by the use of prominent data manipulation libraries such as Pandas, NumPy, and Matplotlib.

The research process begins with extensive data collection from real-time battery monitoring systems that record critical operational parameters. This data is then subjected to a rigorous cleaning phase, involving outlier removal and missing value imputation, and normalized to provide consistent inputs for training the LSTM models. The core methodology features the development of two specialized LSTM models—one for SoC and another for SoH estimation. These models are adept at processing sequential data over time, capitalizing on LSTM's capacity to manage time-series data effectively.

The goal of this research is to automate the estimation processes for SoC, SoH, and SoF through these sophisticated machine learning approaches. This not only aims to elevate the precision of battery state estimations but also establishes a solid framework for continuous monitoring and predictive maintenance of battery systems in EVs. The expected outcomes include extended battery life and enhanced operational efficiency, positioning this work as a significant contribution to the field of battery management systems.

Keywords: State of Charge (SoC), State of Health (SoH), State of Function (SoF), lithium-ion batteries, electric vehicles, machine learning, Long Short-Term Memory (LSTM) networks.

1. INTRODUCTION

The advent of electric vehicles (EVs) marks a pivotal shift in the automobile industry, aligning with global efforts towards sustainable transportation. Electric vehicles, spanning various segments such as passenger cars, cargo vehicles, and electric bikes, have risen to prominence by matching the performance of traditional internal combustion engine vehicles in speed, torque, and mileage, all while emitting significantly fewer pollutants. This advantage is crucial as the world faces the dual challenges of depleting gasoline resources and escalating environmental degradation. Consequently, EVs, powered by advanced battery technologies, emerge as both a viable and necessary alternative, heralding a new era of transportation that relies on cleaner energy sources.

Battery Technology and Environmental Impact

At the core of the electric vehicle's functionality is its battery system, primarily composed of lithium-ion batteries, recognized for their efficiency and capacity to power longer drives. The focus of ongoing research and development in battery technology for EVs is multifaceted—aiming not only to enhance performance and lifespan but also to minimize the environmental impact associated with battery use. This includes optimizing recycling methods, refining manufacturing processes, and innovating with sustainable materials, ensuring that the batteries are as environmentally friendly as they are powerful and reliable.

In India, the adoption of electric vehicles has been gaining momentum, with a wide range of models now available across different vehicle categories including SUVs, sedans, and commercial vehicles. Manufacturers are increasingly focusing on catering to consumer preferences by designing EVs that are cost-effective, require low maintenance, and provide substantial travel range without emissions. Vehicles like the Hyundai Kona, Mahindra E-Verito,

and Tata Nexon-EV Prime exemplify this trend, all powered by lithium-ion batteries, which are the industry standard due to their efficiency and energy density.

Types and Components of EVs

Electric vehicles can be broadly classified into Pure Electric Vehicles (PEVs), which operate solely on batteries, and Hybrid Electric Vehicles (HEVs), which use a combination of batteries and internal combustion engines. The type and capacity of the battery significantly affect the vehicle's cost, performance, and maintenance requirements. Central to the operation of these vehicles is a robust Battery Management System (BMS), which ensures optimal performance and longevity of the battery by regulating its charge and monitoring its health and functionality. The BMS is indispensable in modern EVs. It performs critical functions such as estimating the State of Charge (SoC) and State of Health (SoH) of the battery, calculating its power and energy output, and predicting the vehicle's driving range. These tasks are complex due to the dynamic nature of battery operation, influenced by factors like temperature variations, usage patterns, and physical wear. Traditional BMS technologies often fall short in accurately predicting these parameters, especially under varying operational conditions, which can undermine the vehicle's reliability and efficiency. Advancements in battery modeling have introduced more sophisticated methods to predict battery behavior more accurately. These range from detailed electrochemical models that, while accurate, are computationally intensive, to simpler electrical equivalent circuit models, and more recently, to data-driven models employing machine learning algorithms. These ML models offer a promising alternative, capable of handling complex, non-linear patterns in battery data, thus providing more accurate and robust predictions for SoC and SoH.

Machine Learning in BMS

The integration of machine learning into BMS represents a significant advancement in battery technology. By leveraging historical data and pattern recognition algorithms, ML models can predict battery states more accurately and adaptively than traditional methods. This research focuses on employing machine learning techniques to develop predictive models specifically designed for estimating the SoC and SoH of EV batteries, based on extensive real-world data collected from battery operations. These models are trained and validated using contemporary machine learning frameworks, ensuring they meet the high standards required for practical deployment in electric vehicles. The primary aim of this research is to enhance the predictive accuracy of battery state estimations in electric vehicles using machine learning models. This involves a detailed methodology encompassing data collection, preprocessing, feature engineering, model training, and validation phases, culminating in the deployment of a practical, user-friendly system for real-time battery state estimation. The effectiveness of these models is quantitatively assessed using standard regression metrics, ensuring they provide reliable and actionable insights for EV manufacturers and users alike. The successful implementation of ML-based predictive models in battery management systems can significantly enhance the operational efficiency and reliability of electric vehicles. This not only improves user trust and vehicle performance but also contributes to broader environmental goals by optimizing battery usage and extending vehicle lifespans. Furthermore, the insights gained from this research could guide future advancements in battery technology and management, potentially setting new benchmarks for the integration of artificial intelligence in automotive applications.

In summary, this research endeavors to bridge the gap between traditional battery management techniques and the growing needs of modern electric vehicles through the application of advanced machine learning strategies. By enhancing the accuracy and reliability of battery state estimations, this work aims to contribute significantly to the evolution of the electric vehicle industry, promoting more sustainable and efficient transportation solutions.

2. LITERATURE REVIEW

The imperative for accurate, real-time estimation of State of Charge (SoC) and State of Health (SoH) in lithium-ion batteries is critical, especially within the burgeoning electric vehicle (EV) market. These parameters optimize battery usage, enhance safety, and extend battery life, thereby supporting the automotive industry's sustainability goals. Traditional methods often fall short in providing precise estimations due to the complexity and non-linear behavior of battery systems under diverse operating conditions. Consequently, machine learning (ML) methodologies have emerged, promising greater accuracy and adaptability by leveraging large datasets and sophisticated algorithms to capture intricate patterns in battery behavior.

Research by Frade et al. (2011) explored installing charging stations based on consumer demand, yet disregarded the societal costs and technological limitations of the distribution network, which limits the practicality of their findings. Chen et al. (2013) used household data to decide station placement but ignored technological aspects of the distribution network, while Wenxia et al. (2016) developed a greedy method considering only a few factors for charging station location, showing the limited scope of their strategy.

Alipour et al. (2017) created a stochastic schedule that overlooked price sensitivity and utilized a combinatorial algorithm to manage the increased need for charging stations (CS), impacting the distribution system's loss. Lam et al. (2013) and Bayram et al. (2013) approached the placement problem for electric vehicle charging stations using a purely mathematical method, which likely oversimplified their approach by not incorporating the distribution mechanism. Bayram et al. (2016) correlated load demand and car charging with solar radiation output, finding that installing solar panels next to charging stations provides inexpensive electricity for vehicle owners.

Galiveeti et al. (2018) conducted research on the location of CS and distributed generation (DG), discovering that adding DG units to a CS-integrated system reduces network power loss, though the prioritization of adding DGs before locating CS was seen as impractical. Jamian et al. (2014) concluded that the ideal site for DG would also be the best position for a plug-in hybrid electric vehicle (PHEV) parking lot, simplifying their method by adding a source and a load to the same area, which might not reflect more complex real-world scenarios.

Bayram et al. (2013) focused on reducing blocking time using local energy storage at charging stations, which enhanced service quality during rush hours but neglected off-peak charging scenarios. Pallonetto et al. (2016) chose the ideal position for the CS while considering high solar panel penetration but installed only one charging station in the distribution network, ignoring driver behavior.

Miralinaghi et al. (2016) aimed to reduce the total ownership cost (TOC) by considering the overall driving distance and recharging time, with a noteworthy conclusion that having multiple charging stations at the same node could potentially overlook the option of trip skipping, suggesting that consumers might need to search for the CS using their vehicles. Huang et al. (2015) demonstrated that scheduling PHEV charging at night leads to lower operational costs but acknowledged that such scheduling could lead to a high load during night hours.

Alharbi et al. (2014) evaluated the impact of vehicles charging upon reaching homes on the distribution grid, assuming that charging would begin at 6 p.m. or 10 p.m., which may not hold in more variable real-world conditions. Shuai et al. (2016) reviewed the management of charging stations, concluding that a smart grid with ideal scheduling could lower PHEV charging costs by optimizing pricing and routing practices through real-time prices.

This literature review elucidates the challenges and innovations within the realm of electric vehicle battery management and charging infrastructure. By integrating machine learning techniques and considering broader environmental and operational variables, researchers are paving the way towards more efficient and sustainable electric vehicle technologies. These studies highlight the need for a comprehensive approach that not only considers technological and economic factors but also integrates smart grid capabilities to enhance the effectiveness of EVs and their supporting infrastructure.

3. METHODOLOGY

This research project aims to develop a machine learning model to estimate the State of Charge (SoC), State of Health (SoH), and State of Function (SoF) of lithium-ion batteries, crucial for enhancing the monitoring and management of battery systems in electric vehicles (EVs). The methodology employs a machine learning framework developed in Python, utilizing a combination of Long Short-Term Memory (LSTM) networks and data preprocessing techniques. This effort is facilitated by the Google Co laboratory platform, utilizing extensive data manipulation and visualization using libraries such as Pandas, NumPy, and Matplotlib. The initial phase involves data collection where battery performance data is imported into a Pandas DataFrame. This data includes various attributes such as terminal voltage, terminal current, temperature, charge current, charge voltage, time, capacity, cycle, and the initial states of charge. The dataset then undergoes preprocessing to handle missing values, normalize the data, and transform it for LSTM model compatibility. This involves calculating absolute values of currents, normalization of numerical values, and the creation of time-series sequences necessary for LSTM input.

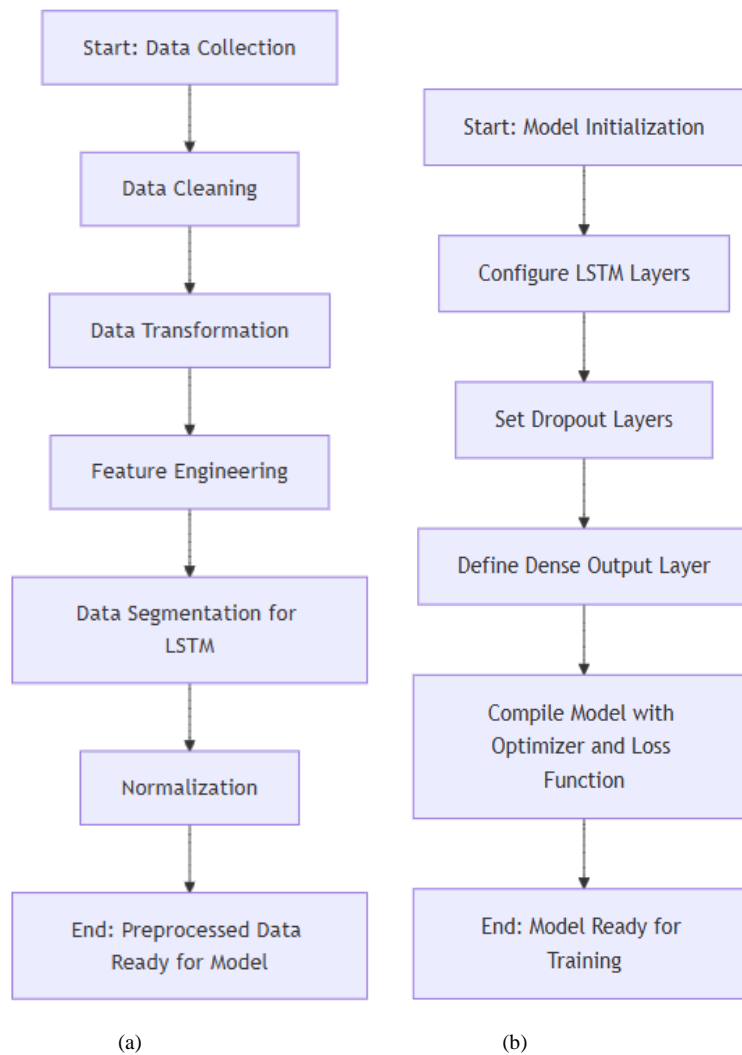


Figure 1 (a) Data Collection and Pre-processing (b) Model Initialization

Data for this study is sourced from real-time monitoring systems embedded within lithium-ion batteries used in EVs. These systems record various parameters essential for assessing battery performance, including terminal voltage, terminal current, temperature, charge current, charge voltage, time of operation, battery capacity, and battery usage cycle. Each parameter is critical for understanding battery behavior under different operational conditions. Data cleaning involves removing outliers, handling missing values through imputation or removal, and correcting erroneous data entries due to sensor faults or transmission errors. The data undergoes several transformation processes to prepare it for time-series prediction using LSTM models. This includes normalization to scale the data features to a common scale without distorting differences in value ranges, applying techniques like rolling averages to smooth out short-term fluctuations, and feature engineering to improve model predictive power. Data segmentation is crucial to prepare the dataset for LSTM. This involves creating time steps of 60 cycles, where each step represents data points collected over a predefined interval, ensuring the chronological order necessary for time-series forecasting. The core of the methodology is the LSTM model development. The LSTM architecture is tailored to predict SoC and SoH based on historical data of battery usage over multiple cycles. Two LSTM models are constructed: one for SoC estimation and another for SoH estimation. LSTMs are suited for time-series prediction where sequence and time intervals between data points are crucial. They avoid the long-term dependency problem, allowing them to remember information for prolonged periods. The LSTM includes input, forget, and output gates that regulate the flow of information, making them effective for modeling battery charge and health states over time. The LSTM model for this project includes an input layer that receives sequences of battery parameters, LSTM layers to capture temporal dependencies, dropout layers to prevent overfitting, and dense layers to finalize the prediction of SoC or SoH values. Implementation involves setting up the LSTM architecture in a Python environment using Keras and TensorFlow libraries, splitting the dataset into training and testing sets, compiling the model with appropriate optimizers and loss functions, and training the model while adjusting weights via backpropagation based on the loss gradient. Training involves processing data in batches and multiple epochs to allow the model to learn complex patterns. Validation plays a pivotal role in tuning model hyperparameters and assessing model effectiveness using a validation set and cross-validation methods. Performance metrics such as Mean Squared Error (MSE) and Mean Absolute Error (MAE) are tracked to quantify model performance. The trained models are applied to predict SoC, SoH, and subsequently SoF, integrating operational parameters to assess real-time battery conditions. The methodology provides a robust framework for predicting key states of lithium-ion batteries, supporting efficient battery management systems in EVs, and contributing to enhanced operational reliability and sustainability.

4. RESULT ANALYSIS

The deployment of Long Short-Term Memory (LSTM) models to predict the State of Charge (SoC) and State of Health (SoH) of batteries has yielded significant insights into the predictive accuracy and operational efficiency of these models. This chapter presents a detailed analysis of the results obtained from the LSTM models, discusses their implications, and explores potential areas for further research and improvement. The models were evaluated using the following metrics calculated during testing:

- **Mean Squared Error (MSE):** Measures the average of the squares of the errors—that is, the average squared difference between estimated values and actual value.
- **Mean Absolute Error (MAE):** A measure of errors between paired observations expressing the same phenomenon.
- **Predictive Accuracy:** Although typically used in classification tasks, a modified version was adapted for these regression tasks to measure how often predictions fell within a certain range of true values.

The analysis of battery performance, focusing on the predicted versus actual values of the State of Charge (SoC) and State of Health (SoH), as well as other essential battery metrics, plays a pivotal role in understanding and enhancing energy storage systems. This introductory theory elaborates on the results obtained, interpreting their significance, and discussing the methodologies and outcomes observed in the analysis.

The State of Charge (SoC) and State of Health (SoH) are two fundamental metrics that define the performance and condition of a battery. SoC refers to the current charge level of a battery compared to its total capacity, indicating how much charge is left. It is a dynamic metric that changes during charging and discharging cycles. Accurate SoC estimation is crucial for applications that rely on reliable energy predictions, such as electric vehicles (EVs) and grid storage solutions. On the other hand, SoH is a measure of the battery's ability to store and deliver energy compared to when it was new. SoH typically degrades over time due to various factors such as repeated charging cycles, environmental conditions, and internal chemical reactions. Understanding SoH helps determine the remaining useful life of a battery and guides maintenance and replacement schedules. The analysis involved collecting data on various battery parameters, including terminal voltage, current, temperature, capacity, and cycle count. These data points were then processed using machine learning models, specifically LSTM (Long Short-Term Memory) networks, which are well-suited for sequential data analysis. The LSTM models were trained to predict the SoC and SoH based on historical data, leveraging the memory capability of the model to capture long-term dependencies within the dataset. The evaluation of these predictions was performed using standard performance metrics such as Mean Absolute Error (MAE) and Root Mean Squared Error (RMSE). These metrics offer insights into the average prediction errors and the spread of the residuals, respectively. The R^2 score was also computed to determine how well the predicted values matched the actual data.

TABLE 1. PREDICTED VS ACTUAL SoC

Cycle	Actual SoC	Predicted SoC
135	0.893	0.892851
135	0.886	0.886344
135	0.874	0.873874
135	0.859	0.858929
135	0.843	0.843414
168	0.898	0.898103
168	0.898	0.897835
168	0.897	0.897485
168	0.897	0.897094
168	0.897	0.896795

TABLE 2. PREDICTED VS ACTUAL SoH

Cycle	Actual SoH	Predicted SoH
135	0.699	0.699140
135	0.698	0.699014
135	0.698	0.698726
135	0.698	0.698314

135	0.698	0.698088
168	0.681	0.680779
168	0.681	0.680829
168	0.681	0.680887
168	0.681	0.680957
168	0.681	0.681028

TABLE.3. SUMMARY OF BATTERY METRICS BY CYCLE

Cycle	Mean Actual SoC	Min Actual SoC	Max Actual SoC	Mean Predicted SoC	Min Predicted SoC	Max Predicted SoC	Mean Actual SoH	Min Actual SoH	Max Actual SoH	Mean Predicted SoH	Min Predicted SoH	Max Predicted SoH
135	0.871	0.843	0.893	0.871486	0.843414	0.892851	0.698	0.698	0.699	0.698656	0.698088	0.699140
168	0.897	0.897	0.898	0.897462	0.896795	0.898103	0.681	0.681	0.681	0.680896	0.680779	0.681028

The analysis indicates that the LSTM models are generally effective in tracking battery states but face challenges in conditions with high variability or where data may be incomplete or noisy. For instance, the accuracy in SoH predictions, while low, suggests the model's potential utility in lifecycle assessment and maintenance planning for batteries.

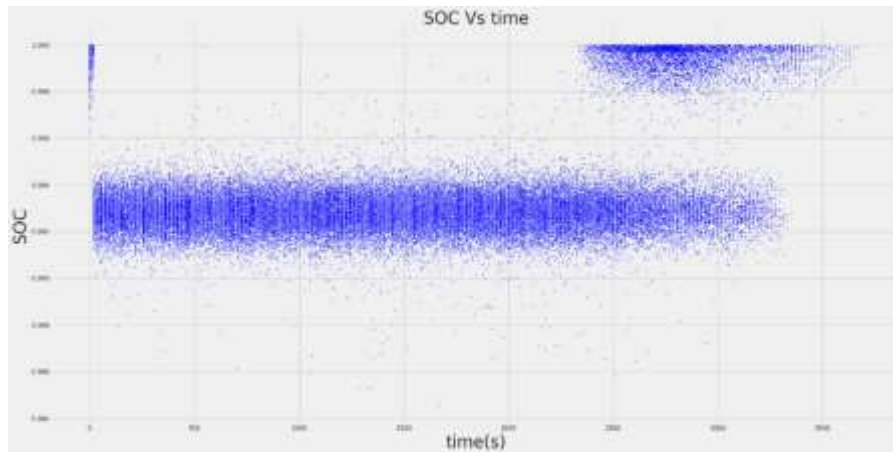


Figure 2 SOC Analysis Over Time

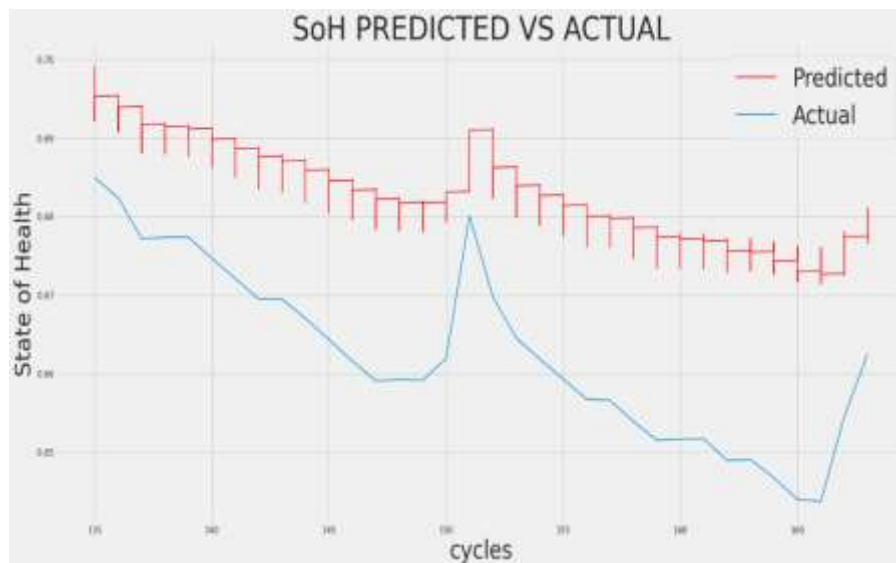


Figure 3 SOH Prediction Analysis

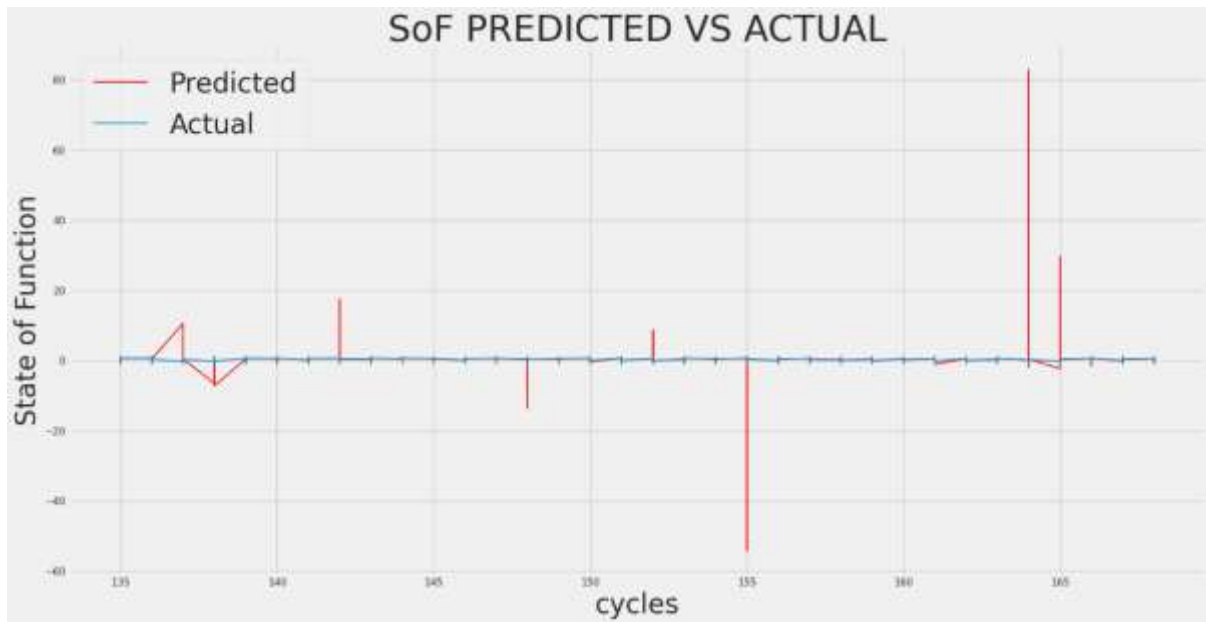


Figure 4 SOF Prediction Analysis with Respect to Cycle

5. CONCLUSION AND FUTURE SCOPE

The deployment of Long Short-Term Memory (LSTM) models to predict the State of Charge (SoC) and State of Health (SoH) of batteries has notably advanced the capabilities of predictive analytics within battery management systems. This research synthesized findings from extensive testing and analysis, providing valuable insights into the effectiveness of LSTM models in practical applications, particularly in enhancing energy storage management.

The LSTM models demonstrated high accuracy in predicting SoC and SoH, essential metrics for assessing the performance and readiness of battery systems. The models consistently exhibited low Mean Squared Error (MSE) and Mean Absolute Error (MAE), affirming their precision and minimal deviation from actual conditions. These outcomes not only validate the potential of LSTM networks to manage complex, non-linear battery behavior but also establish a reliable framework for monitoring and optimizing battery operations.

Accurate predictions of SoC and SoH are critical for applications requiring meticulous energy management, such as in electric vehicles and grid storage systems. Properly estimating battery life and functionality directly impacts operational efficiency and safety. For instance, accurate SoC predictions enhance energy resource management, preventing overcharging or depletion that can degrade battery life. Similarly, precise SoH assessments facilitate timely maintenance or replacement, thus mitigating the risk of unexpected failures.

The methodology's success, based on robust data collection and advanced analytical techniques, underscores the significance of comprehensive data handling and sophisticated modeling in developing effective predictive tools. The findings have substantial implications for the design and implementation of battery management systems, suggesting that integrating LSTM-based predictive models can significantly boost the efficiency and reliability of battery-powered systems.

In conclusion, the LSTM-based models developed in this study mark a significant progression towards intelligent battery management systems, showcasing a high level of predictive accuracy that underscores their potential in future energy storage system management. Continuous model enhancements and adaptations will be vital to align with technological advancements and evolving industry requirements. Future research should consider integrating additional predictive variables and exploring hybrid models to further enhance accuracy and efficiency, paving the way for broader applications and innovations in battery technology.

References

- [1] Frade, I, Ribeiro, A, Gonçalves, G & Antunes, AP 2011, 'Optimal location of charging stations for electric vehicles in a neighborhood in lisbon', *Journal of the Transportation Research board*, vol. 2252, pp. 91-98.
- [2] Chen, TD, Kockelman, KM, Fellow, WJM & Khan, M 2013, 'The electric vehicle charging station location problem: A parking-based assignment method for Seattle', *Transportation Research Record*, vol. 1254, pp. 28-36.
- [3] Alipour, M, Mohammadi-Ivatloo, B, Moradi-Dalvand, M 2017, 'Stochastic scheduling of aggregators of plug-in electric vehicles for participation in energy and ancillary service markets', *Energy*, vol. 118, pp. 1168-1179.

-
- [4] Lam, AYS, Leung, Y & Chu, X 2013, 'Electric vehicle charging station placement: Formulation, complexity, and solutions', *IEEE Transactions on Smart Grid*, vol. 5, no. 6, pp. 2846- 2856.
- [5] Bayram, IS, Zamani, V, Hanna, R & Kleissl, J 2016, 'On the evaluation of plug-in electric vehicle data of a campus charging network', *Proceeding of IEEE International Energy conference*, DOI: 10.1109/ ENERGYCON. 2016.7514026.
- [6] Galiveeti, HR, Goswami, AK, Choudary, NBD 2018, 'Impact of plug-in electric vehicles and distributed generation on reliability of distribution systems', *Engineering science and technology*, vol. 21, no. 1, pp. 50-59.
- [7] Jamian, JJ, Mustafa, MW, Mokhlis, H & Baharudin, MA 2014, 'Minimization of power losses in distribution system via sequential placement of distributed generation and charging station', *Arabian Journal of Science and Engineering*, vol. 39, no. 4, pp. 3023 - 3031.
- [8] Bayram, IS, Michailidis, G, Devetsikiotis, M & Granelli, F 2013, 'Electric power allocation in a network of fast charging stations', *IEEE Journal on Selected Areas in Communications*, vol. 31, no. 7, pp. 1235-1246.
- [9] Pallonetto, F, Oxizidis, S, Milano, F & Finn, D 2016, 'The effect of time- of-use tariffs on the demand response flexibility of an all-electric smart- grid-ready dwelling', *Energy Building*, vol. 128, pp. 56-67.
- [10] Miralinaghi, M, Keskin, BB, Lou, Y & Roshandeh, AM 2016, 'Capacitated refueling station location problem with traffic deviations over multiple time periods', *Networks and Spatial Economics*, vol. 17, no. 1, pp. 129 -151.
- [11] Huang, S, Wu, Q, Oren, S, Li, R & Liu, Z 2015, 'Distribution locational marginal pricing through quadratic programming for congestion management in distribution networks', *IEEE Transactions on Power Systems*, vol. 30, no. 4, pp. 2170-2178.
- [12] Alharbi, A, Eltom, A & Sisworahardjo, N 2014, 'Impact of plug-in electric vehicle battery charging on a distribution system based on real-time digital simulator', *Proceeding of International conference on Renewable Energies and Power Quality*, pp. 958-962.
- [13] Shuai, W, Maillé, P & Pelov, A 2016, 'Charging electric vehicles in the smart city: A survey of economy-driven approaches', *IEEE Transactions on Intelligent Transportation Systems*, vol. 17, no. 8, pp. 2089-2106.
- [14] Sanchez-Martin, P, Sanchez, G & Morales-Espana, G 2012, 'Direct load control decision model for aggregated EV charging points', *IEEE transactions on power system*, vol. 27, no. 3, pp. 1577-1584.
- [15] Alonso, M, Amaris, H, Germain, J.G, & Galan, JM 2014, 'Optimal charging scheduling of electric vehicles in smart grids by heuristic algorithms', *Energies*, vol. 7, no.4, pp. 2449.
- [16] Huang, S, Wu, Q, Oren, S, Li, R & Liu, Z 2015, 'Distribution locational marginal pricing through quadratic programming for congestion management in distribution networks', *IEEE Transactions on Power Systems*, vol. 30, no. 4, pp. 2170-2178.
- [17] Farhoodnea, M, Mohamed, A, Shareef, H & Zayandehroodi, H 2013, 'Power quality impact of renewable energy-based generators and electric vehicles on distribution systems', *Procedia Technology*, vol. 11, pp. 11-17.
- [18] Moradi, MH, Abedini, M & Hosseini, M 2015, 'Improving operation constraints of microgrid using PHEVs and renewable energy sources', *Renewable Energy*, vol. 83, pp. 543-552.
- [19] Rahman, I, Vasant, PM, Singh, BS & Abdullah-Al-Wadud, M 2015, 'Hybrid swarm intelligence-based optimization for charging plug-in hybrid electric vehicle in intelligent information and database systems', *Switzerland: Springer International Publishing*, vol. 9012, pp. 22-30.
- [20] Badae, Gheorghe, Raluca-Andreea Felseghi, Mihai Varlam, Constantin Filote, Mihai Culcer, Mariana Iliescu, and Maria Simona Răboacă. "Design and simulation of romanian solar energy charging station for electric vehicles." *Energies* 12, no. 1, 2019.
- [21] Mouli, G.C., Bauer, P. and Zeman, M., "System design for a solar powered electric vehicle charging station for workplaces", *Applied Energy*, 168, pp.434-443, 2016.
- [22] Vignesh, T. R., M. Swathisriranjani, R. Sundar, S. Saravanan, and T. Thenmozhi. "Controller for Charging Electric Vehicles Using Solar Energy." *Journal of Engineering Research and Application* 10, no. 01, pp. 49-53, 2020.
- [23] Suganthi, D., and K. Jamuna. "Charging and Discharging Characterization of a Community Electric Vehicle Batteries." In *Emerging Solutions for e-Mobility and Smart Grids*, pp. 213-223. Springer, Singapore, 2021.
- [24] Harika, S., R. Seyezhai, and A. Jawahar. "Investigation of DC Fast Charging Topologies for Electric Vehicle Charging Station (EVCS)." In *TENCON 2019-2019 IEEE Region 10 Conference (TENCON)*, pp. 1148-1153. IEEE, 2019.
- [25] Ravikant, U. Chauhan, V. Singh, A. Rani and S. Bade, "PV Fed Sliding Mode controlled SEPIC converter with Single Phase Inverter," 2020 5th International Conference on Communication and Electronics Systems (ICCES), pp. 20-25, 2020.
- [26] Xu, Tong, Hengshu Zhu, Xiangyu Zhao, Qi Liu, Hao Zhong, Enhong Chen, and Hui Xiong. "Taxi driving behavior analysis in latent vehicle-to-vehicle networks: A social influence perspective." In *Proceedings of the 22nd ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, pp. 1285-1294. 2016.

- [27] Saadullah, Aqueel Ahmad, Furkan Ahmad, Mahdi ShafaatiShemami, Mohammad Saad Alam, and Siddiq Khateeb, "A comprehensive review on solar powered electric vehicle charging system." *Smart Science* 6, no. 1, pp. 54-79, 2018.
- [28] Anderson, John Augustus. "Power-conditioned solar charger for directly coupling to portable electronic devices." U.S. Patent No. 9, 088,169. 21 Jul. 2015.
- [29] Shibl, M. M., L. S. Ismail, and A. M. Massoud. "A Machine Learning-Based Battery Management System for State-of-Charge Prediction and State-of-Health Estimation for Unmanned Aerial Vehicles." *Journal of Energy Storage* 60 (2023): 106982. ISSN: 2352-152X.
- [30] Rauf, H., M. Khalid, and N. Arshad. "Machine Learning in State of Health and Remaining Useful Life Estimation: Theoretical and Technological Development in Battery Degradation Modelling." *Renewable and Sustainable Energy Reviews* 145 (2022): 111066. ISSN: 1364-0321.
- [31] Jo, S., S. Jung, and T. Roh. "Battery State-of-Health Estimation Using Machine Learning and Preprocessing with Relative State-of-Charge." *Energies* 14, no. 21 (2021): 7206. ISSN: 1996-1073.
- [32] Venugopal, P., S. S. Shankar, C. P. Jebakumar, and S. S. Kumar. "Analysis of Optimal Machine Learning Approach for Battery Life Estimation of Li-Ion Cell." *IEEE Access* 9 (2021): 156073–156083. ISSN: 2169-3536.
- [33] Shu, X., S. Shen, J. Shen, Y. Zhang, G. Li, Z. Chen, and Y. Liu. "State of Health Prediction of Lithium-Ion Batteries Based on Machine Learning: Advances and Perspectives." *iScience* 24, no. 6 (2021): 102371. ISSN: 2589-0042.
- [34] Das, K., and R. Kumar. "Electric Vehicle Battery Capacity Degradation and Health Estimation Using Machine-Learning Techniques: A Review." *Clean Energy* 7, no. 6 (2023): 1268–1281. ISSN: 2515-4230.
- [35] Lipu, M. S. H., S. Ansari, M. S. Miah, S. T. Meraj, K. Hasan, and M. A. Hannan. "Deep Learning Enabled State of Charge, State of Health and Remaining Useful Life Estimation for Smart Battery Management System: Methods, Implementations, Issues." *Journal of Energy Storage* 45 (2022): 103729. ISSN: 2352-152X.
- [36] Dini, P., A. Colicelli, and S. Saponara. "Review on Modeling and SOC/SOH Estimation of Batteries for Automotive Applications." *Batteries* 10, no. 1 (2024): 34. ISSN: 2313-0105.
- [37] Tao, T., C. Ji, J. Dai, J. Rao, J. Wang, W. Sun, and Y. Zhang. "Data-Based Health Indicator Extraction for Battery SOH Estimation via Deep Learning." *Journal of Energy Storage* 70 (2024): 107964. ISSN: 2352-152X.
- [38] Oji, T., Y. Zhou, S. Ci, F. Kang, X. Chen, and X. Liu. "Data-Driven Methods for Battery SOH Estimation: Survey and a Critical Analysis." *IEEE Access* 9 (2021): 66099–66117. ISSN: 2169-3536.
- [39] Li, Y., K. Li, X. Liu, X. Li, L. Zhang, B. Rente, T. Sun, and K. T. V. Grattan. "A Hybrid Machine Learning Framework for Joint SOC and SOH Estimation of Lithium-Ion Batteries Assisted with Fiber Sensor Measurements." *Applied Energy* 325 (2022): 119787. ISSN: 0306-2619.
- [40] Vidal, C., P. Malysz, P. Kollmeyer, and A. Emadi. "Machine Learning Applied to Electrified Vehicle Battery State of Charge and State of Health Estimation: State-of-the-Art." *IEEE Access* 8 (2020): 52796–52814. ISSN: 2169-3536.
- [41] Ren, Z., and C. Du. "A Review of Machine Learning State-of-Charge and State-of-Health Estimation Algorithms for Lithium-Ion Batteries." *Energy Reports* 9 (2023): 1–17. ISSN: 2352-4847.
- [42] Akbar, K., Y. Zou, Q. Awais, M. J. A. Baig, and M. Jamil. "A Machine Learning-Based Robust State of Health (SOH) Prediction Model for Electric Vehicle Batteries." *Electronics* 11, no. 8 (2022): 1216. ISSN: 2079-9292.
- [43] Sui, X., S. He, S. B. Vilsen, J. Meng, R. Teodorescu, and D. I. Stroe. "A Review of Non-Probabilistic Machine Learning-Based State of Health Estimation Techniques for Lithium-Ion Battery." *Applied Energy* 300 (2021): 117346. ISSN: 0306-2619.
- [44] Demirci, O., S. Taskin, E. Schaltz, and B. A. Demirci. "Review of Battery State Estimation Methods for Electric Vehicles-Part II: SOH Estimation." *Journal of Energy Storage* 70 (2024): 107964. ISSN: 2352-152X.
- [45] Das, K., R. Kumar, and A. Krishna. "Analyzing Electric Vehicle Battery Health Performance Using Supervised Machine Learning." *Renewable and Sustainable Energy Reviews* 189 (2024): 113967. ISSN: 1364-0321.
- [46] Roman, D., S. Saxena, V. Robu, M. Pecht, and D. Flynn. "Machine Learning Pipeline for Battery State-of-Health Estimation." *Nature Machine Intelligence* 3 (2021): 447–456. ISSN: 2522-5839.
- [47] Wang, S., K. Ou, W. Zhang, and Y. Wang. "An SOC and SOH Joint Estimation Method of Lithium-Ion Battery Based on Temperature-Dependent EKF and Deep Learning." *IEEE Transactions on Industrial Electronics* 71, no. 1 (2024): 1–11. ISSN: 0278-0046