



# International Journal of Research Publication and Reviews

Journal homepage: [www.ijrpr.com](http://www.ijrpr.com) ISSN 2582-7421

## “Effect of Soft Storey and Infill Walls on Seismic Response In zone 4 and 5”

<sup>1</sup>Mr. Pratik V. Lavand, <sup>2</sup>Mr. Shambhuraje S. Patil, <sup>3</sup>Miss. Anushka V. Kharade, <sup>4</sup>Prof. Supriya Shinde

<sup>1,2,3</sup> Student, Department of Civil Engineering, APCOER, Parvati, Pune

<sup>4</sup> Assistant Professor, Department of Civil Engineering, APCOER, Parvati, Pune

### ABSTRACT—

It is common knowledge that structures that are constructed with RC frames and have an open first retail (also known as a soft story) perform poorly when significant earthquake shaking is applied to them. When the existence of masonry infill walls is factored into the behaviour of the structure when it is subjected to lateral stresses, the structure's lateral stiffness and lateral load carrying capacity significantly increase. This is because the presence of the infill walls allows the structure to better resist the lateral stresses. This is due to the fact that the presence of masonry infill walls has an effect on the functioning of the structure as a whole. In order to explain how vulnerable structures with soft floors are to earthquakes, this entire essay makes use of the illustration of a G+6 reinforced concrete structure. The modelling of the infill wall is accomplished with the help of ETab Software.

Keywords: RC Frame, Earthquake Zone, E Tab, Soft storey, Infill walls, RSA Analysis

### INTRODUCTION

Reinforced concrete frames with Masonry infills are often used in the construction of high-rise structures in urban and semi-urban settings all over the world. This material combination is frequently used as the primary material combination for building construction. The term "infilled frame" is the term that is used when referring to a composite structure that is generated by the combination of a moment-resisting plane frame with infill walls. This type of structure is formed when the two elements are brought together. Masonry can be constructed using a variety of materials, including brick, concrete units, stones, and so on. Bricks are the material of choice for lining the interior of the RC frame, which functions as a partition wall but does not contribute to the building's structural integrity.

In high-rise structures, there is an urgent demand to offer a ground floor that is open to the public in order to satisfy both social and practical needs. These needs include the provision of space for vehicle parking, retail outlets, and reception areas, among other uses. Underground parking is currently considered a required amenity for the vast majority of multi-story structures in urban areas. In spite of the knowledge that multi-story buildings with parking levels, also referred to as "soft storeys," are liable to collapse as a result of the forces exerted on them by earthquakes, construction of these buildings proceeds uninterrupted. The majority of the time, these buildings are conceived of as framed structures, and the structural action of the masonry infill walls receives very little consideration from the designers.

When constructing a reinforced concrete building with a moment-resisting frame, it is recommended that stiffness balancing be carried out between the first and second levels of the structure. The building's first floor and second level will both have open floor plans.

Brick is typically utilized for the construction of the infill on the uppermost floors. An evaluation of a straightforward example structure calls for the use of a number of different models. The lateral displacement profile of the building, as well as the bending moment and shear force in the columns of the first storey, are all things that can be used to determine the effect that the building's stiffness has had on the first floor.

### Objectives

1. Design and analysis RCC Frame Structure with Infill wall for zone 4 and zone 5
2. Modelling of the infill wall and to check the effect of soft storey on infill wall by using ETab Software
3. To analysis by using response spectrum analysis method to compare both the model using the technical parameters

4. The lateral displacement profile of the building, as well as the bending moment and shear force in the first-storey columns, show the stiffness effect on the first floor.

### Problem Statement:

The term infilled frame is used to denote a composite structure formed by the combination of a moment resisting plane frame and infill walls. The masonry can be of brick, concrete units, or stones. Usually the RC frame is filled with bricks as non-structural wall for partition of rooms so we need study on this structure for zone 4 and zone5 by using RSA method.

### Methodology

- Study for literature review survey
- Study of structure RCC soft storey with infill wall structure and all parameters
- RCC soft storey structure including infill wall descriptions
- RSA analysis using ETAB software
- Analysis result
- Result and discussion
- Conclusion

### DESIGN AND ANALYSIS

#### Input Parameters

| Story | Stiffness Y 2 | $K_i$     | check   | $K_{mi} = \text{avg}(K_{i-1,i-2,i-3})$ | $K_i$    | check      |
|-------|---------------|-----------|---------|--|----------|------------|
|       |               | $K_{i+1}$ |         |  | $K_{mi}$ |            |
|       |               | 0.7       |         |  | 0.8      |            |
| TER   | 7839.447      | -         | -       |  |          |            |
| 6TH   | 57936.673     | 7.39      |         |  |          |            |
| 5TH   | 113516.734    | 1.96      | Regular |  |          |            |
| 4TH   | 144972.904    | 1.28      | Regular | 59764.28                               |          |            |
| 3TH   | 177665.604    | 1.23      | Regular | 105475.44                              | 1.68     | Regular    |
| 2TH   | 183933.505    | 1.04      | Regular | 145385.08                              | 1.27     | Regular    |
| 1TH   | 130470        | 0.71      | Regular | 168857.34                              | 0.77     | Soft Story |
| GF    | 178789.723    | 1.37      | Regular | 164023.04                              | 1.09     | Regular    |
| BASE  | 901896.31     | 5.04      | Regular | 164397.74                              | 5.49     | Regular    |

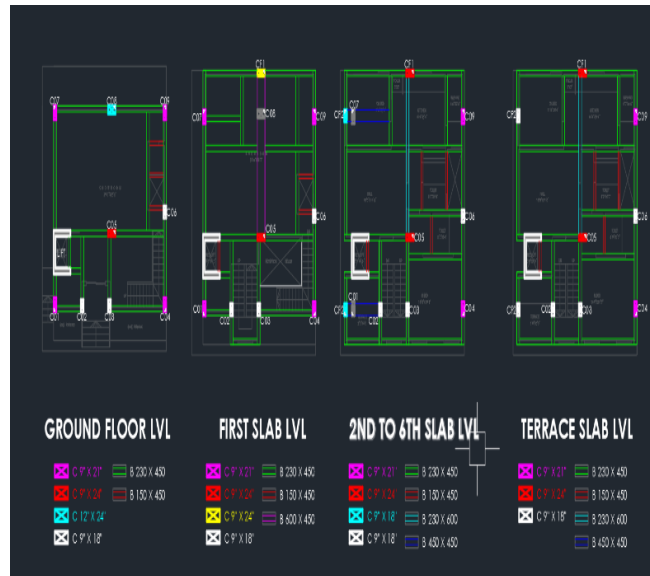


Figure 1.1: CAD Plan Design

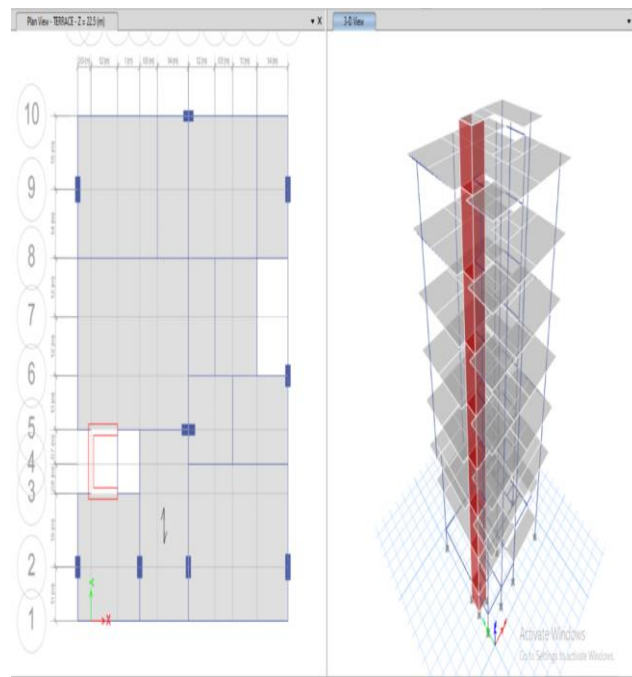


Figure 1.2: Plan & 3D View

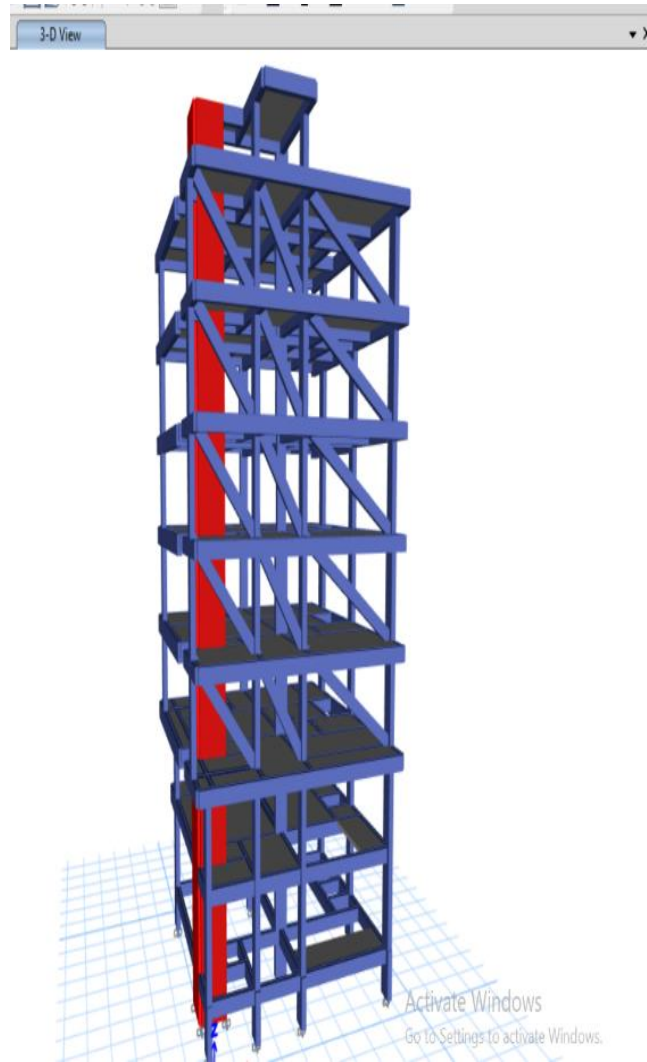


Figure1.3: Structure (Infill Wall Machinery)

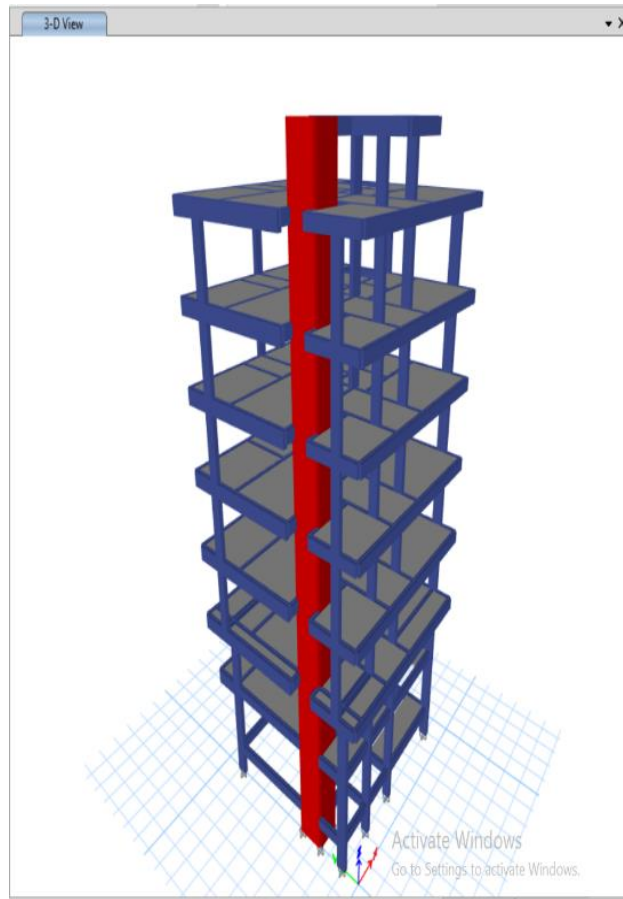


Figure1.4: 3D Render View

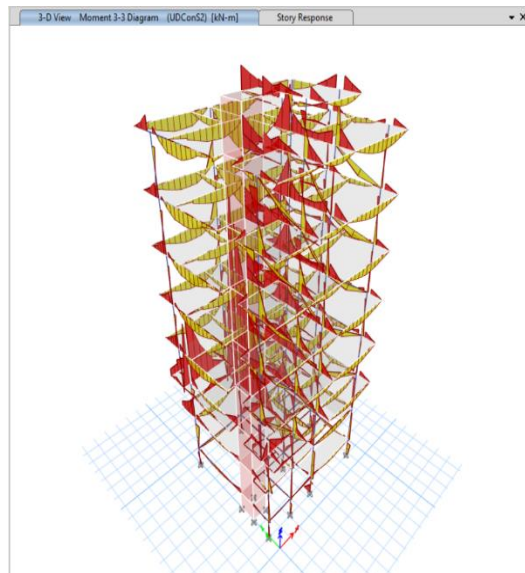


Figure1.5: Bending Moment of Zone 4

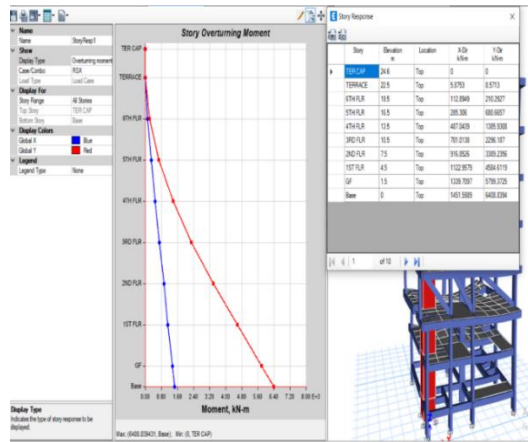


Figure1.6: Overturning Moment of Zone 4

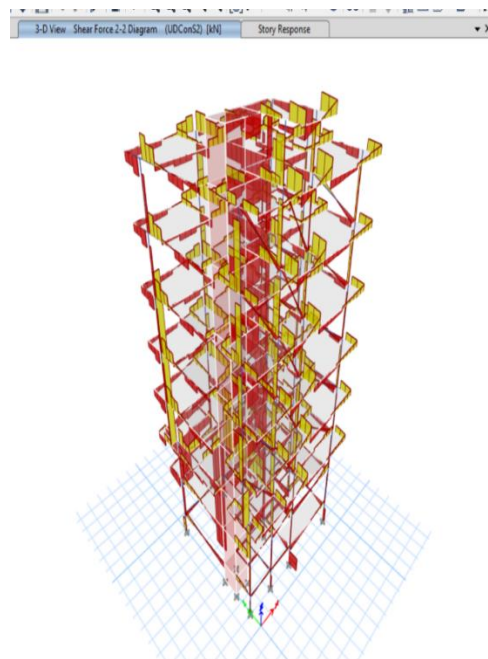


Figure1.7: SF1 ZONE4

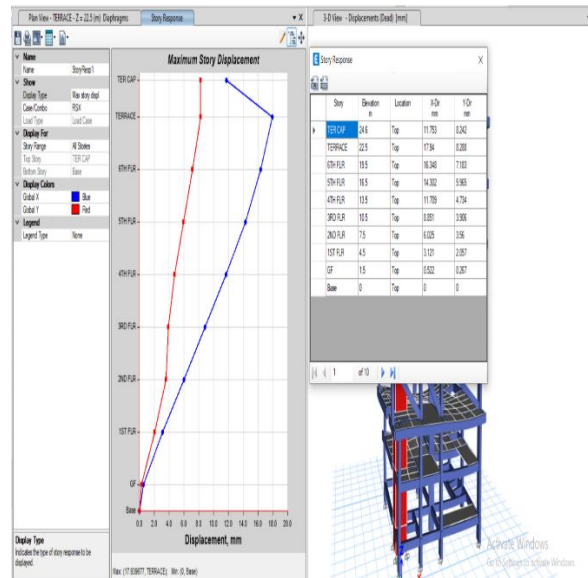


Figure1.8: Storey Displacement of Zone 4

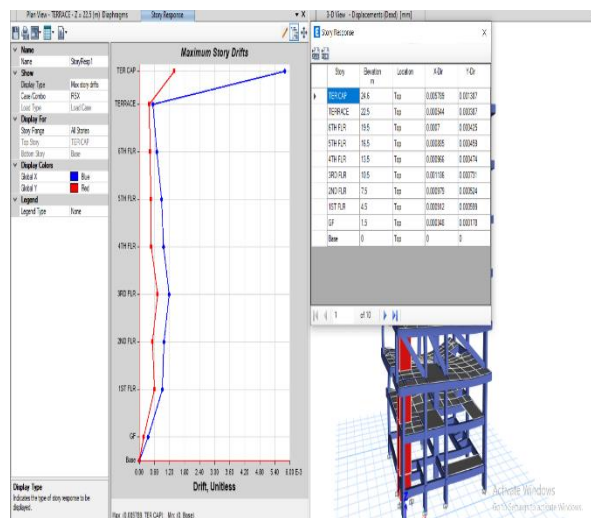


Figure1.9: Storey Drift of Zone 4

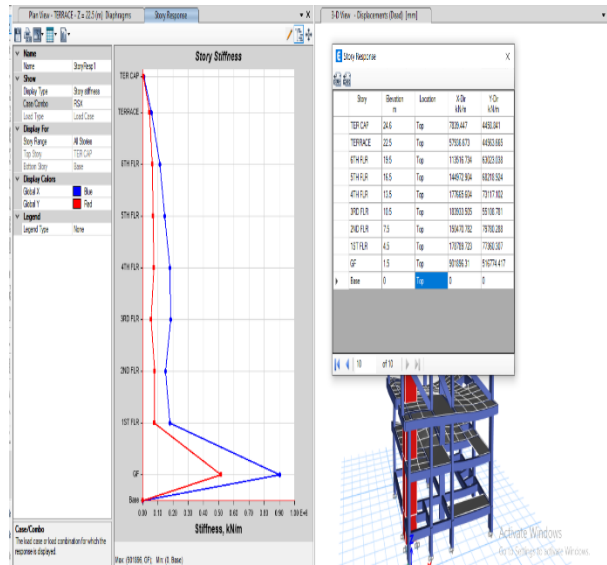


Figure1.10: Storey Stiffness of Zone-4

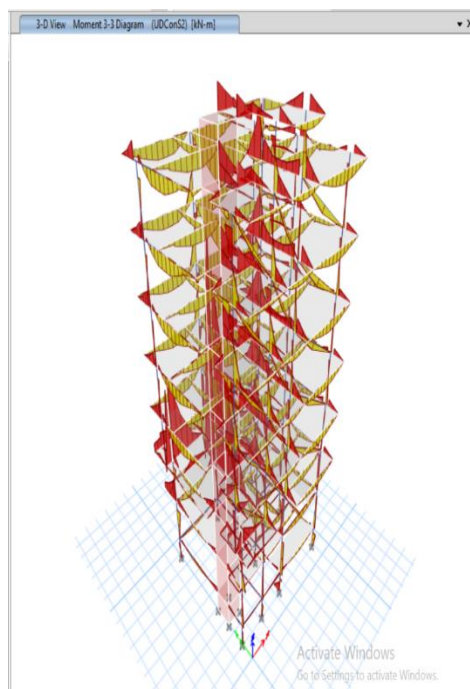


Figure4.14: SF1 For Zone-5



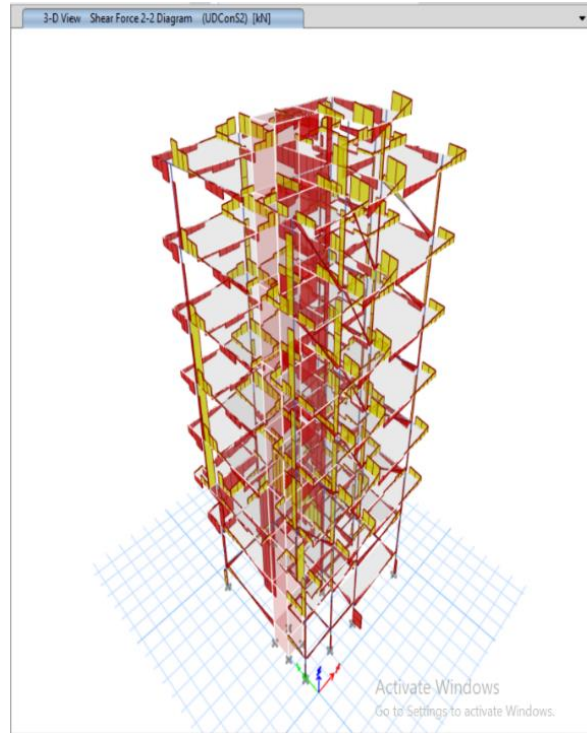


Figure4.11: Bending Moment of Zone-4

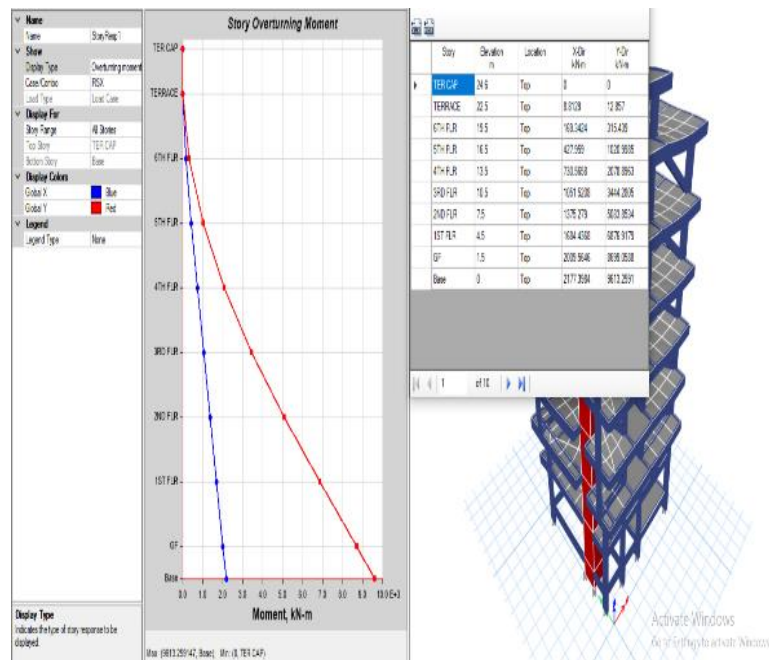


Figure4.12: Overturning Moment of Zone-5

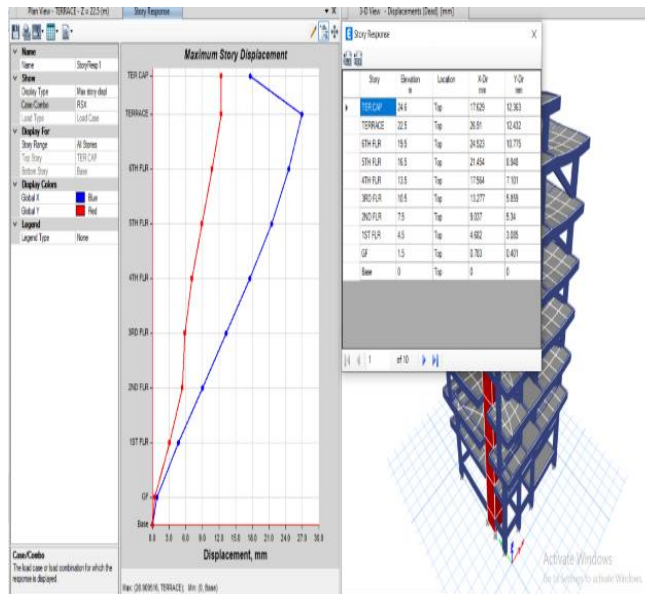
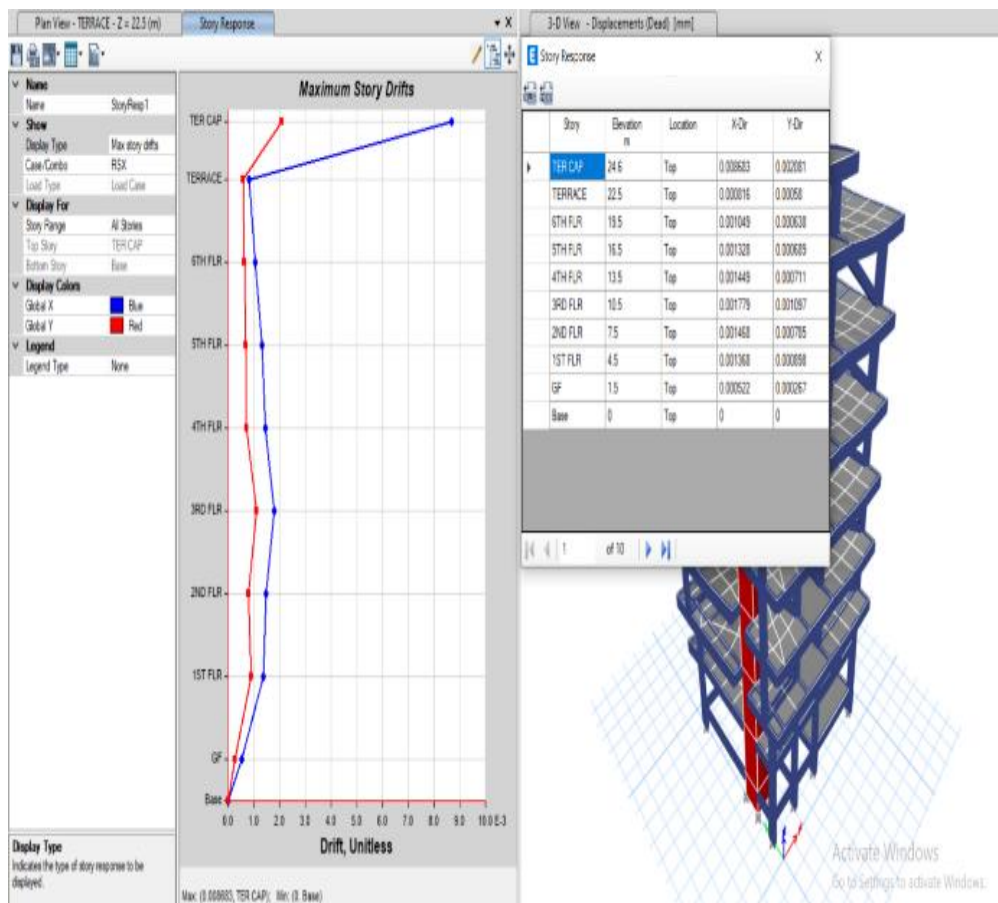


Figure4.13: Storey Displacement of Zone-5




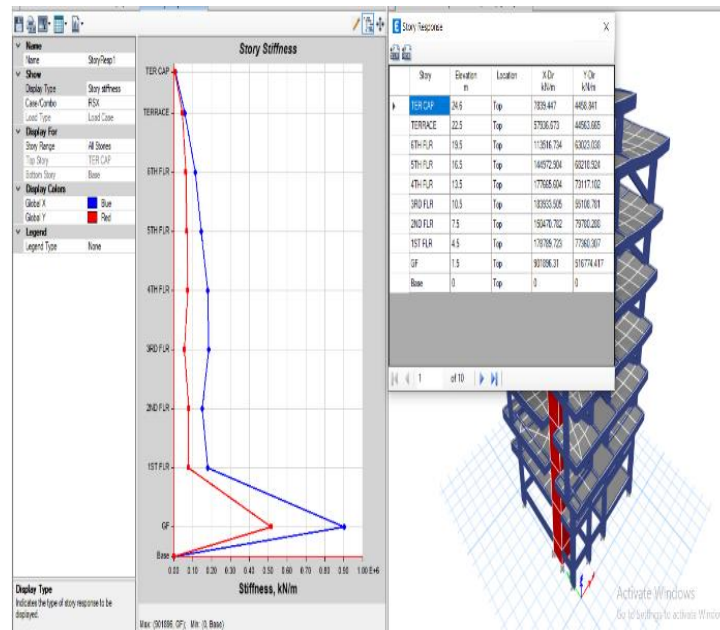


Figure4.15: STOREY DRIFT ZONES

Parametric Study of Maximum Storey Displacement of Earthquake Zone-4

Table1.1: Maximum Storey Displacement Earthquake Zone-4

| Maximum Storey Displacement |                       |
|-----------------------------|-----------------------|
| Storey                      | Max Displacement (mm) |
| TER CAP                     | 18.18                 |
| TERRACE                     | 22.889                |
| 6TH FLR                     | 21.37                 |
| 5TH FLR                     | 19.239                |
| 4TH FLR                     | 16.246                |
| 3RD FLR                     | 12.835                |
| 2ND FLR                     | 9.228                 |
| 1ST FLR                     | 4.605                 |
| GF                          | 0.577                 |
| Base                        | 0                     |

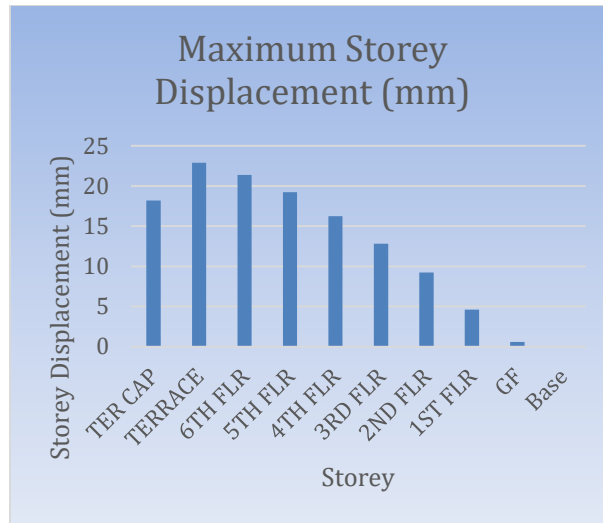


Graph1.1: Maximum Storey Displacement of Earthquake Zone-4

### 1.2 Maximum Storey Drift of Zone-4

Table1.2: Maximum Storey Drift of Zone-4

| Maximum Storey Drift |              |
|----------------------|--------------|
| Storey               | Storey Drift |
| TER CAP              | 0.008931     |
| TERRACE              | 0.000566     |
| 6TH FLR              | 0.000802     |
| 5TH FLR              | 0.00111      |
| 4TH FLR              | 0.001203     |
| 3RD FLR              | 0.001233     |
| 2ND FLR              | 0.001543     |
| 1ST FLR              | 0.001347     |
| GF                   | 0.000385     |
| Base                 | 0            |

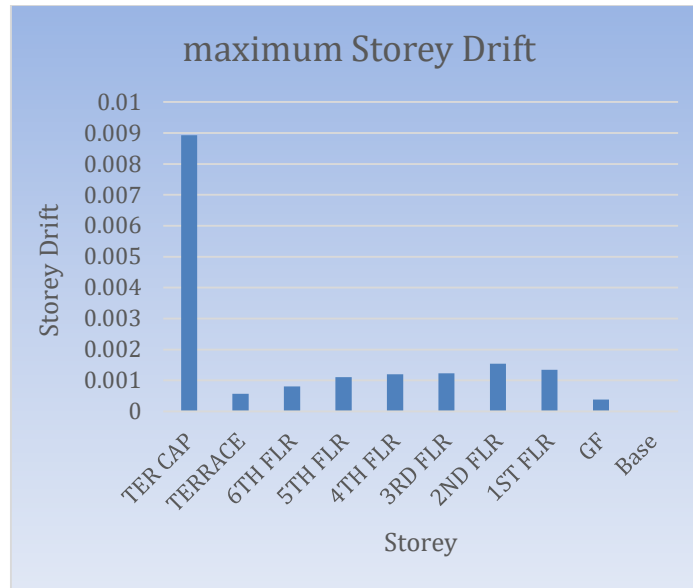


Graph1.2: Maximum Storey Drift of Zone-4

1.3 Maximum Overturning Moment of Zone-4

Table1.3: Maximum Overturning Moment of Zone-4

| Maximum Overturning Moment (KN-M) |               |
|-----------------------------------|---------------|
| Storey                            | Moment (Kn-m) |
| TER CAP                           | 0             |
| TERRACE                           | 8.289         |
| 6TH FLR                           | 181.5793      |
| 5TH FLR                           | 562.1857      |
| 4TH FLR                           | 1077.9818     |
| 3RD FLR                           | 1670.0578     |
| 2ND FLR                           | 2328.2035     |
| 1ST FLR                           | 3052.5949     |
| GF                                | 3816.628      |
| Base                              | 4206.7364     |

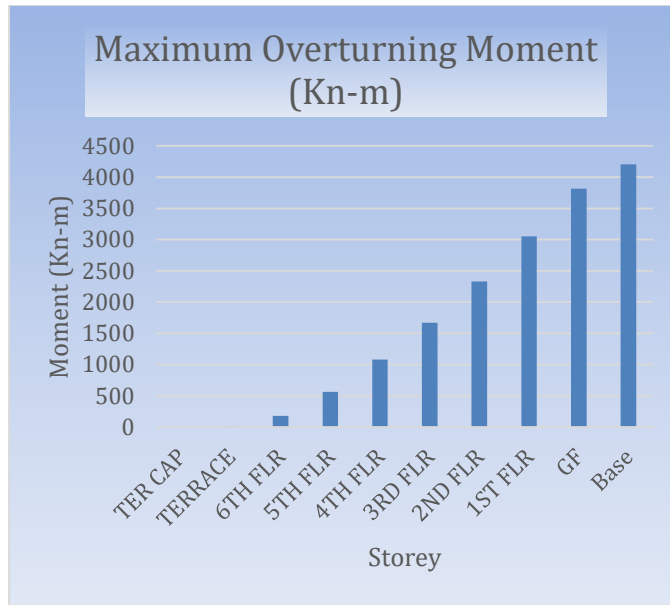


Graph1.3: Maximum Overturning Moment of Zone-4

1.4 Base Shear for Zone-4

Table1.4: Base Shear for Zone-4

| Base Shear |             |                 |  |
|------------|-------------|-----------------|--|
| Direction  | Time period | Base Shear (KN) |  |
| EQX        | 1.15        | 486.2758        |  |
| EQY        | 1.727       | 323.6754        |  |

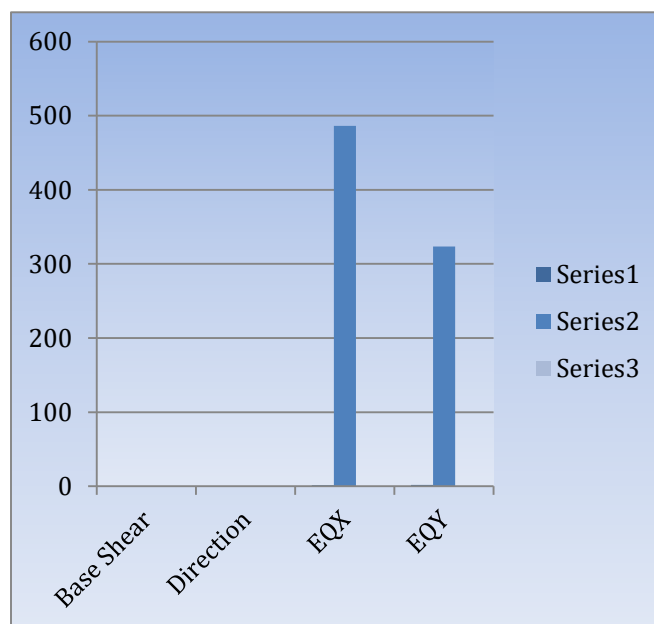


**Graph5.4: Base Shear for Zone-4**

**1.5 Maximum Storey Acceleration for Zone-4**

**Table1.5: Maximum Storey Acceleration for Zone-4**

| Storey Acceleration (Mm/S2) |        |
|-----------------------------|--------|
| Storey                      | Zone4  |
| TER CAP                     | 396.57 |
| TERRACE                     | 604.96 |
| 6TH FLR                     | 501.93 |
| 5TH FLR                     | 431.25 |
| 4TH FLR                     | 403.34 |
| 3RD FLR                     | 380.2  |
| 2ND FLR                     | 313.87 |
| 1ST FLR                     | 213.55 |
| GF                          | 43.7   |
| Base                        | 0      |

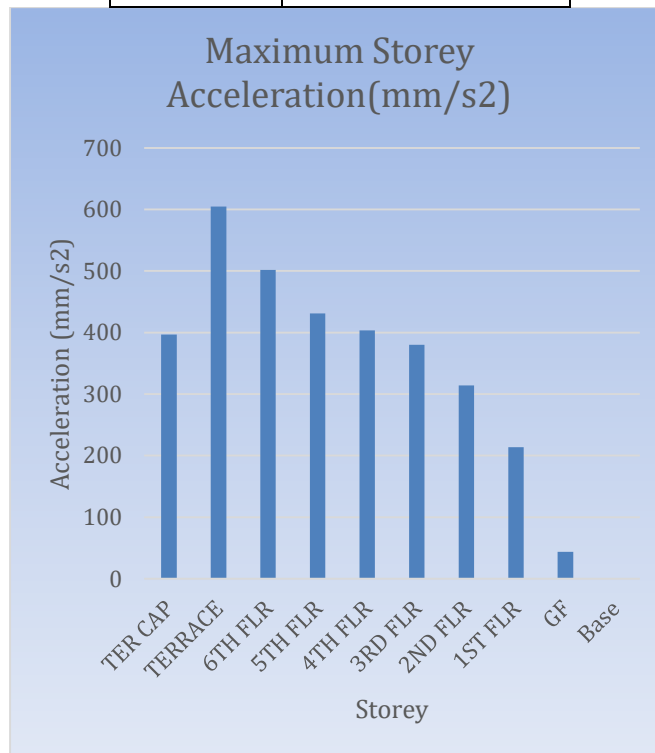


Graph5.5: Maximum Storey Acceleration for Zone-4

**1.2 Parametric Study of Maximum Storey Displacement of Earthquake Zone-5**

**Table1.6: Maximum Storey Displacement of Earthquake Zone-5**

| Storey Displacement |  |
|---------------------|--|
|                     |  |

| Storey  | Max Displacement (mm) |
|---------|-----------------------|
| TER CAP | 27.27                 |
| TERRACE | 34.333                |
| 6TH FLR | 32.055                |
| 5TH FLR | 28.859                |
| 4TH FLR | 24.369                |
| 3RD FLR | 19.253                |
| 2ND FLR | 13.842                |
| 1ST FLR | 6.907                 |
| GF      | 0.865                 |
| Base    | 0                     |

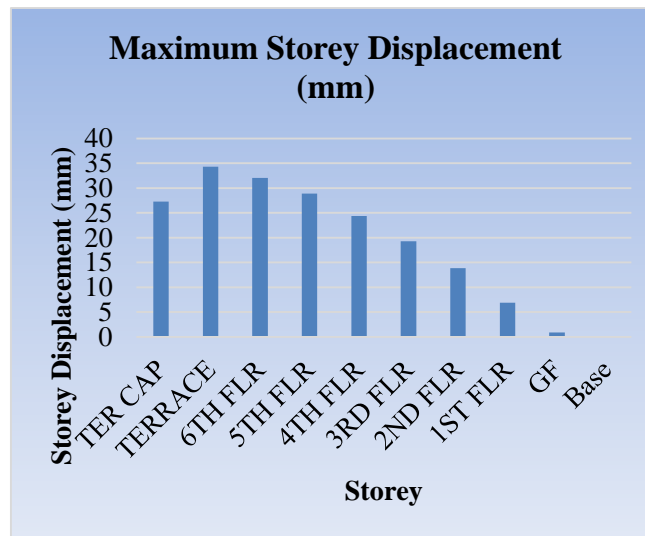

Graph1.6: Maximum Storey Displacement of Earthquake Zone-5


## 1.7 Maximum Storey Drift of Zone-5

Table5.7: Maximum Storey Drift of Zone-5

| Maximum Storey Drift |              |
|----------------------|--------------|
| Storey               | Storey Drift |
| TER CAP              | 0.013396     |
| TERRACE              | 0.000849     |
| 6TH FLR              | 0.001204     |
| 5TH FLR              | 0.001665     |
| 4TH FLR              | 0.001805     |
| 3RD FLR              | 0.00185      |



|                |                 |
|----------------|-----------------|
| <b>2ND FLR</b> | <b>0.002314</b> |
| <b>1ST FLR</b> | <b>0.00202</b>  |
| <b>GF</b>      | <b>0.000577</b> |
| <b>Base</b>    | <b>0</b>        |

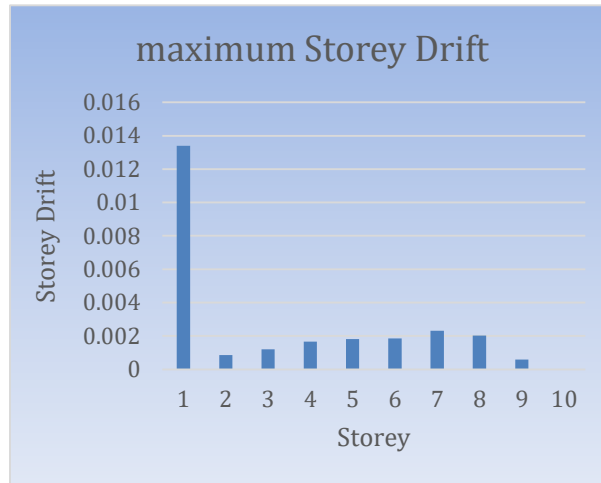


Graph1.7: Maximum Storey Drift of Zone-5

### 1.8 Maximum Overturning Moment for Zone-5

Table1.8: Maximum Overturning Moment for Zone-5

| Maximum Overturning Moment (KN-M) |                  |
|-----------------------------------|------------------|
| Storey                            | Moment (Kn-m)    |
| <b>TER CAP</b>                    | <b>0</b>         |
| <b>TERRACE</b>                    | <b>12.4335</b>   |
| <b>6TH FLR</b>                    | <b>272.3689</b>  |
| <b>5TH FLR</b>                    | <b>843.2785</b>  |
| <b>4TH FLR</b>                    | <b>1616.9727</b> |
| <b>3RD FLR</b>                    | <b>2505.0867</b> |
| <b>2ND FLR</b>                    | <b>3492.3053</b> |
| <b>1ST FLR</b>                    | <b>4578.8924</b> |
| <b>GF</b>                         | <b>5724.9421</b> |
| <b>Base</b>                       | <b>6310.1045</b> |
|                                   |                  |

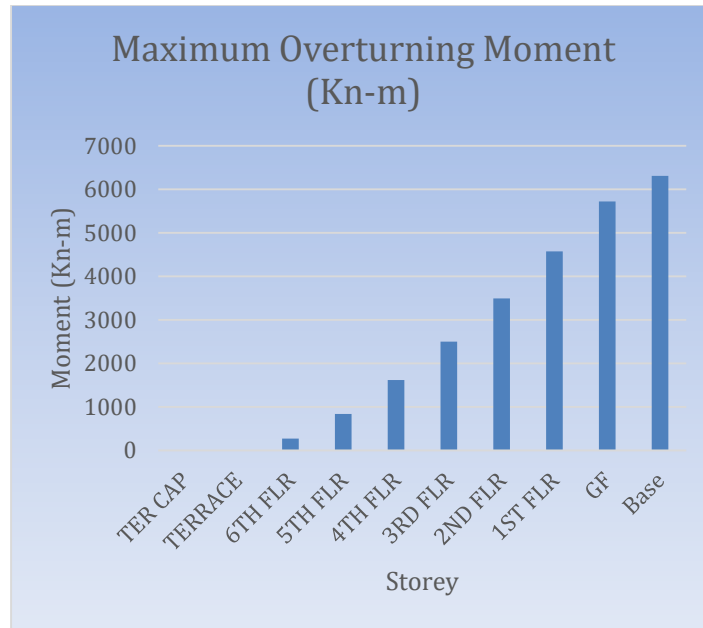


Graph5.8: Maximum Overturning Moment for Zone-5

1.9 Maximum Base Shear for Zone-5

Table1.9: Maximum Base Shear for Zone-5

| Base Shear |             |                 |
|------------|-------------|-----------------|
| Direction  | Time period | Base Shear (KN) |
| EQX        | 1.15        | 729.4137        |
| EQY        | 1.727       | 485.5131        |

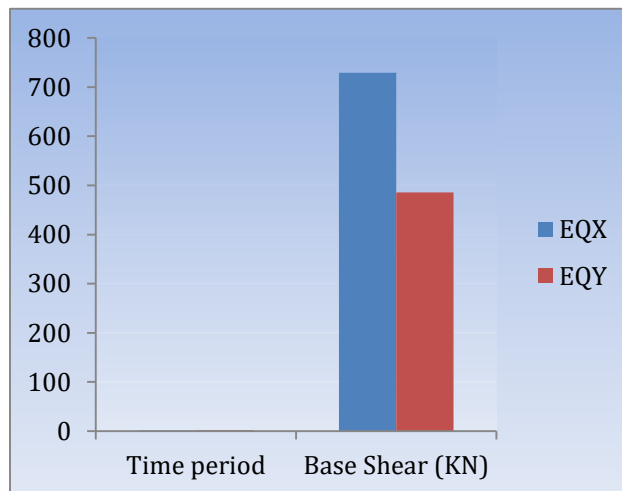


Graph1.9: Maximum Base Shear for Zone-5

### 1.10 Maximum Storey Acceleration for Zone-5


Table1.10: Maximum Storey Acceleration for Zone-5

| Storey acceleration (mm/s <sup>2</sup> ) |        |
|--|--------|
| Storey                                   | zone4  |
| TER CAP                                  | 594.85 |
| TERRACE                                  | 907.44 |
| 6TH FLR                                  | 752.89 |
| 5TH FLR                                  | 646.87 |
| 4TH FLR                                  | 605.02 |
| 3RD FLR                                  | 570.29 |
| 2ND FLR                                  | 470.81 |
| 1ST FLR                                  | 320.33 |
| GF                                       | 65.55  |
| Base                                     | 0      |

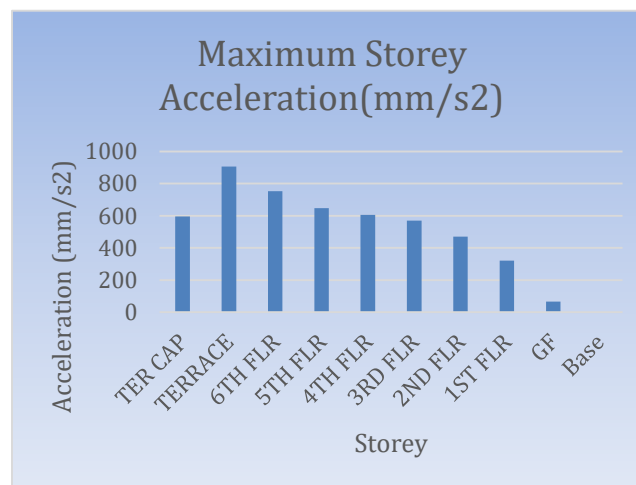

Graph1.10: Maximum Storey Acceleration for Zone-5

### 1.11 Comparative Parametric and Graphical Study of Maximum Storey Displacement Zone-4 & Zone-5

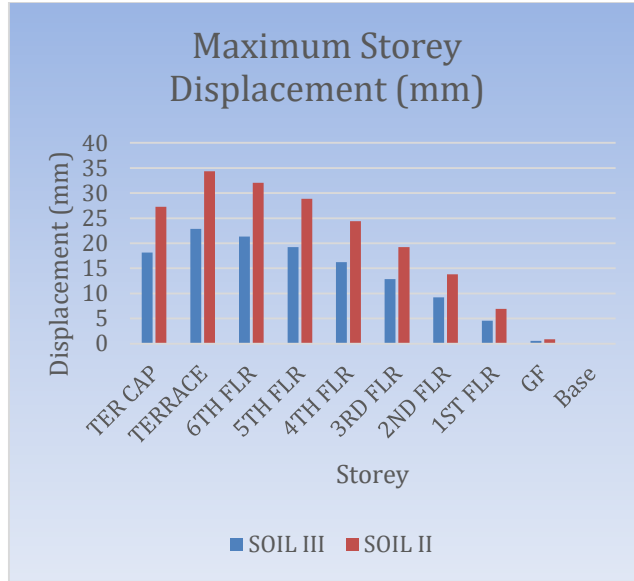

Graph1.11: Comparative Study of Maximum Storey Displacement for Zone-4 & 5


Table1.11: Comparative Study Maximum Storey Displacement for Zone 4& 5

| Maximum Storey Displacement (Mm) |        |        |
|----------------------------------|--------|--------|
| Storey                           | Zone4  | Zone5  |
| TER CAP                          | 18.18  | 27.27  |
| TERRACE                          | 22.889 | 34.333 |
| 6TH FLR                          | 21.37  | 32.055 |
| 5TH FLR                          | 19.239 | 28.859 |
| 4TH FLR                          | 16.246 | 24.369 |
| 3RD FLR                          | 12.835 | 19.253 |
| 2ND FLR                          | 9.228  | 13.842 |
| 1ST FLR                          | 4.605  | 6.907  |
| GF                               | 0.577  | 0.865  |
| Base                             | 0      | 0      |

1.12 Comparative Study Maximum Storey Drift for Zone4& 5

Table1.12: Comparative Study Maximum Storey Drift for Zone4& 5

| Maximum Storey Drift |          |          |
|----------------------|----------|----------|
| Storey               | Zone4    | Zone5    |
| Ter Cap              | 0.008931 | 0.013396 |
| Terrace              | 0.000566 | 0.000849 |
| 6th Flr              | 0.000802 | 0.001204 |
| 5th Flr              | 0.00111  | 0.001665 |
| 4th Flr              | 0.001203 | 0.001805 |
| 3rd Flr              | 0.001233 | 0.00185  |
| 2nd Flr              | 0.001543 | 0.002314 |
| 1st Flr              | 0.001347 | 0.00202  |
| Gf                   | 0.000385 | 0.000577 |
| Base                 | 0        | 0        |

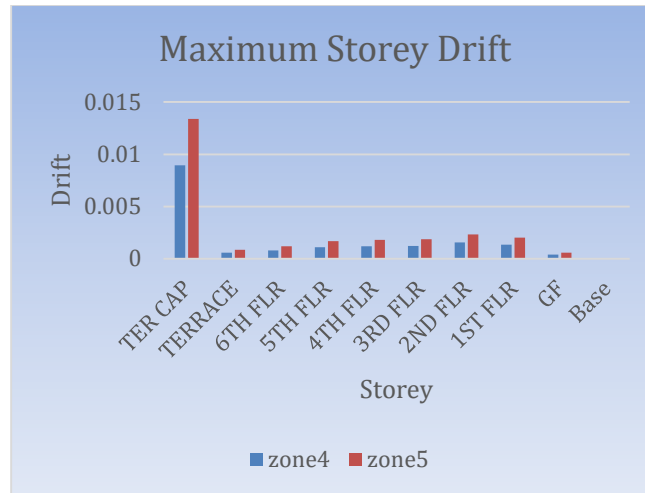


Graph5.12: Comparative Study Maximum Storey Drift for Zone4&amp; 5

### 1.13 Comparative Study Maximum Overturning Moment for Zone4& 5

Table1.13: Comparative Study Maximum Overturning Moment for Zone4& 5

| Maximum Overturning Moment (Kn-M) |          |           |
|-----------------------------------|----------|-----------|
| Storey                            | Zone4    | Zone5     |
| Ter Cap                           | 0        | 0         |
| Terrace                           | 8.289    | 12.4335   |
| 6th Flr                           | 181.5793 | 272.3689  |
| 5th Flr                           | 562.1857 | 843.2785  |
| 4th Flr                           | 1077.982 | 1616.9727 |
| 3rd Flr                           | 1670.058 | 2505.0867 |
| 2nd Flr                           | 2328.204 | 3492.3053 |
| 1st Flr                           | 3052.595 | 4578.8924 |
| Gf                                | 3816.628 | 5724.9421 |
| Base                              | 4206.736 | 6310.1045 |

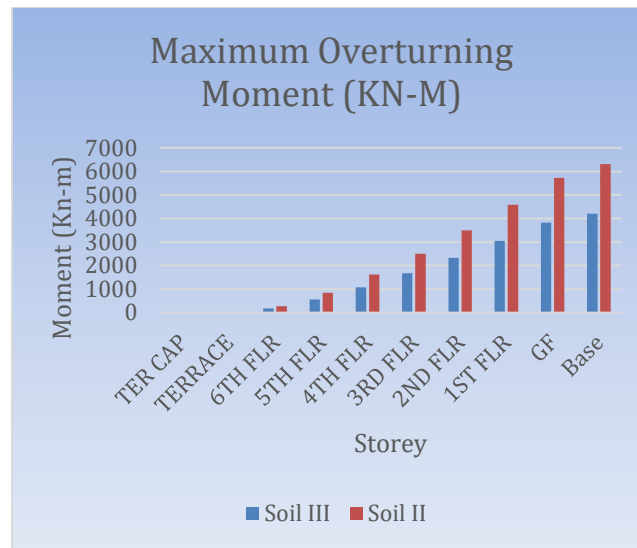

Graph1.13: Comparative Study maximum Overturning Moment for Zone-4 &amp; 5

## CONCLUSION

- Maximum Storey Displacement: Maximum storey Displacement in Structure varies from 1.5 times greater from zone V (34.33mm) to zone IV (22.889mm).
- Maximum Overturning Moment: Maximum Overturning Moment in Structure varies from 1.5 times greater from zone V (6310 KN/M) to zone IV (4206 KN/M).
- Maximum Storey Drift: Maximum Storey Drift in Structure varies from 1.5 times from zone V (0.000849) to zone IV (0.000566.)
- Maximum Base Shear: Maximum Base Shear in Structure varies from 1.5 times greater from zone V (729.4 KN) to zone IV (486.3 KN).
- Maximum Storey Acceleration: Maximum Storey Acceleration in Structure varies from 1.5 times greater from zone V (907 mm/s<sup>2</sup>) to zone IV (604 mm/s<sup>2</sup>).
- The columns steel percentage from zone IV to zone V varies from 1.02% and 1.5 % respectively.

## ACKNOWLEDGEMENT

While working on this paper to its final formation, i would like to thank who contributes in this research. It is a pleasure to convey my gratitude to all of them. I am indebted to my guide prof. -----and head of the department **Dr. -----** and also thanks to PG coordinator: -----who have motivate me to doing his research. It is quite difficult to express my gratitude in few words. Last but not the least; i am thankful to all my professors and non-teaching staff members in the department whose help provided to be an advantage in completing the project. Also, i would like to acknowledge the moral support of my parents and friends. I am thanks again to all peoples who helped me during this paper work.

## REFERENCES

1. On the Seismic Behavior of Masonry Infilled Frame Structures João Dias-Oliveira 1 , Hugo Rodrigues, MDPI, 1 August 2022
2. Irregularity Effects of Masonry Infills on Nonlinear Seismic Behaviour of RC Buildings, Massimiliano Ferraioli, and Angelo Lavino, Hindawi, 2020
3. Recent Findings and Open Issues concerning the Seismic Behaviour of Masonry Infill Walls in RC Buildings Andr'e Furtado, and Maria Teresa de Risi, Hindawi, 2020
4. Influence of masonry infills on seismic response of RC frames under low frequency cyclic load , Ning Ning, Zhongguo John Ma, Pengpeng Zhang, Dehu Yu, Jianlang Wang, Engineering Structures, 2019
5. Study on the effect of soft story on infill RC frames under seismic effect, Mahesh Raj Bhatt, Prachand Man Pradhan, Sudip Jha, Kathmandu University journal of science, Engineering and technology, 2017
6. Effect of Soft Storey on Structural Response of High Rise Building, Vipin V Halde, Aditi H. Deshmukh, International Journal of Innovative Research in Science, Engineering and Technology, 2015
7. Effect of Infill Masonry Panels on the Seismic Response of frame Buildings, T. Elouali, Elsevier 2019

8. Effect of the Openings on the Seismic Response of an Infilled Reinforced Concrete Structure André Furtado, Hugo Rodrigues, MDPI, 18 November 2022
9. Seismic Response of High-Rise Building with The Effect of Soft Storey On Various Levels, V. Preetha, S. Gokul Prasath, S. Suresh Kannan, V. Senthil Kumar, International Journal of Engineering and Advanced Technology (IJEAT), June 2019
10. Torsional Effect on Multi-Storeyed Building on Regular and Irregular Shape of Building with and without Infill by Using P-Delta Analysis, Shaikh Salman, D. H. Tupe , Dr. G. R. Gandhe, International Journal of Science and Research (IJSR) 2017
11. Effect of Infill Walls on Response of Multi Storey Reinforced Concrete Structure Ayman Abd-Elhamed, Sayed Mahmoud, International Journal of Civil, Environmental, Structural, Construction and Architectural Engineering, 2015
12. Seismic Retrofit of RC Frame Buildings with Masonry Infill Walls: Literature Review and Preliminary Case Study Mike GRIFFITH, European Commission Joint Research Centre Institute for the Protection and Security 2019
13. “Seismic Response of High Rise Building with Ground Soft Storey” 1Hitenkumar L. Kheni 2Krishna Kakadiya, GRD Journal for Engineering | Emerging Research and Innovations in Civil Engineering (ERICE - 2019)
14. The effect of infill walls on the seismic response of irregular r.c frames 1Hussam Oreiby, 2Mahmoud El-Kateb, International Journal of Creative Research Thoughts (IJCRT) 2022
15. Effect of floating columns and soft storey on seismic response of multi-storeyed RC framed buildings Avinash Biradar1 , Shivanand C. G, International Journal of Creative Research Thoughts (IJCRT), 2018
16. Influence of masonry infill walls and other building characteristics on seismic collapse of concrete frame buildings, SIAMAK SATTAR, Elsevier 2020
17. Effect of core wall on seismic response of soft story RC building Umashankar Dewangan1, Dr. S. K. Dubey, International Research Journal of Engineering and Technology (IRJET), June 2018
18. Comparative study of effect of infill walls on fixed base and base isolated reinforced concrete structures Manthan H. Vasani, Satyen D. Ramani, Journal of Emerging Technologies and Innovative Research (JETIR)2018
19. Comparative study on the seismic performance assessment of existing buildings with and without retrofit strategies rakesh Dumar, Hugo Rodrigues, International Journal of Advanced Structural Engineering (2018)
20. Seismic impact analysis in multi- storey building using infill Ashish Rai, IJARIE, 2021
21. Seismic analysis of open ground storey structure with shear wall and cross bracings Divyanjali K U, The International Conference on Emerging Trends in Engineering, September 2021
22. Influence of Masonry Infill Wall Position and Openings in the Seismic Response of Reinforced Concrete Frames Abdelghaffar Messaoudi, Rachid Chebili, MDPI Journal, 21 September 2022