



# International Journal of Research Publication and Reviews

Journal homepage: [www.ijrpr.com](http://www.ijrpr.com) ISSN 2582-7421

## GESTURE CONTROL ROBOT USING ARDUINO

***Dr. Pravin Kshirsagar<sup>1</sup>, Prof. Sayali Zade<sup>2</sup>, Nilima D. Chawale<sup>3</sup>, Saurabh G. Pat<sup>4</sup>, Masum Chahande<sup>5</sup>, Atharv Pande<sup>6</sup>, Prajka Tambe<sup>7</sup>***

<sup>1234567</sup> Department of Electronics and Telecommunication Engineering, JDCOEM Nagpur.

### ABSTRACT :

A robot that can be operated with basic human gestures is called a "gesture-controlled car." All the user has to do is wear a gesture device with a sensor built in. The robot will move in the appropriate directions when the sensor records a hand movement in a particular direction. Radio waves are used to establish a wireless connection between the robot and the Gesture instrument. Thanks to wireless connection, users can engage with the robot more amicably. Using accelerometer sensors attached to a hand glove, we can operate the vehicle. The remote control that is typically used to operate the vehicle is supposed to be replaced by the sensors. In addition to controlling the car's throttle with the same accelerometer sensor, it will enable the user to control the vehicle's forward, backward, left, and right movements.

Keywords: Robot, Sensor, Gesture, Accelerometer, Arduino.

### INTRODUCTION

Numerous businesses, including manufacturing, assembly, services, and construction, use robots. The main advantage of hand gestures is that they provide a more schematic way to direct robots. Wireless communication makes it easier to connect with a robot in a more friendly way because hand movements are natural to humans. When a gesture-controlled robot obeys human commands, it is considered semi-autonomous. These can be controlled by gestures, a phone, a remote, etc. Gesture-controlled robot that is fully controlled by an Arduino that gets commands from another Arduino

Within the current setup, the robot detects and imitates the actions of human hands using sensors. The accelerometer moves in tandem with the person's hand movements and sensor displacements, detecting parameters based on the hand's position. With the help of this system, a robotic car that is gesture-driven is created, meaning that the user's gestures determine how the vehicle moves and handles. The potential for applications in a variety of industries, including healthcare, entertainment, and industrial automation, has made human-robot interaction a prominent research area. Hand gesture control has drawn a lot of attention among the various interaction techniques since it is intuitive and natural.

In this study, we show the Arduino-based Hand Gesture Controller Robot Car design and implementation, which allows users to manipulate a robot car's motion with hand gestures. This system uses an accelerometer to record gestures, which are then processed by microcontroller software. The parameters are then transmitted to the encoder circuit and microcontroller. This system uses an accelerometer to record gestures, which are then processed by microcontroller software. The parameters are then transmitted to the encoder circuit and microcontroller.

### PROBLEM STATEMENT

The traditional wired buttons-controlled robot becomes very bulky and it also limits the distance the robot goes. The Wireless Hand controlled Robot will function by a wearable hand glove from which the movements of the hand can be used as the input for the movement of the robot. The basic idea of our project is to develop a system (Robot) which can recognize the Human Interaction with it to accomplish the certain tasks assigned to it. In our project we will design a wearable Hand Glove which will contain the sensors mounted on it to capture the movement of the hand and convert the raw mechanical data into electrical form.

### OBJECTIVE

The project's goal is to create a human-machine interface for controlling a robot arm. Our goal is to simplify and lower the cost of this technology so that it can be manufactured and utilized for a variety of applications. The goal of this project is to construct a remotely gesture-controlled automobile. By donning a controller glove and using preset gestures, the user can also control the car's movements in this project. Additionally, there are other possible uses for this, like wireless controller racing cars, etc.

## LITERATURE REVIEW

To improve the interactivity of industrial robot control systems, this paper has designed a control system based on hand gestures. The system is divided into four parts: the IMU is used in the acquisition of human hand gestures, the signal processing of the IMU is analysed, the relationship between gestures and robot movements in linear motion mode and joint motion mode is analysed, the ABB IRB 120 robot is used as a test object and its program is designed, and finally, the effectiveness of the method proposed in this paper is validated. Currently, the primary programming methods for industrial robots are off-line programming and instructional programming, both of which are time-consuming and require skilled robotics technicians. (1)

Human-robot interaction, which translates human body movements into digital signals through somatosensory devices for teleoperation control, has been the subject of much research on data-driven remote control. It is a clever and practical way to manage the robot and complete the agricultural activity in a complicated setting. This research presents the design of a three-dimensional convolutional neural network based real-time dynamic recognition system for agricultural robots. Following the presentation of the inverted residual structure and deep separable convolution, the gesture classification network architecture is covered. (2)


The ability to operate industrial robots via natural interfaces, including hand gestures, is becoming more and more popular as a way to increase their flexibility and usefulness as these machines play a bigger role in manufacturing and assembly processes. Compared to more conventional techniques like programming, using hand gestures to operate robots has a number of advantages. It reduces the need for intensive training and streamlines the programming process because it is a natural and straightforward way to connect with the robot. The development of hand gesture recognition systems that can precisely decipher human gestures and convert them into orders for robots has advanced significantly in recent years. Usually, these systems record hand movements using cameras or other sensors, then utilize machine learning algorithms to identify and categorize the gesture. (3)


## RESOURCES REQUIRED

- Arduino Nano
- Trans-receiver module NRF24L01
- Accelerometer ADXL335
- 4 Motors for Wheels
- Motor driver L298N
- Battery

**SOFTWARE REQUIRED:** Arduino IDE

## BLOCK DIAGRAM

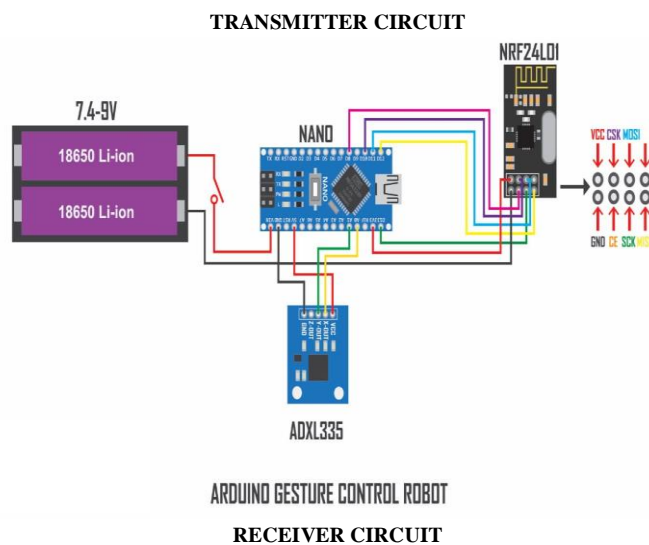

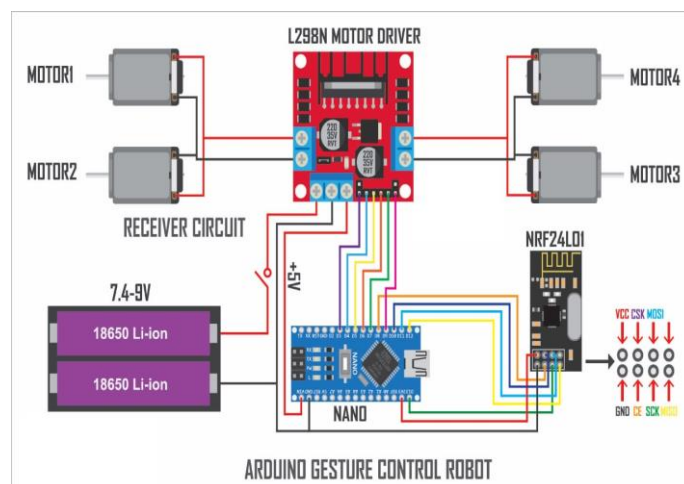

## WORKING

In this architecture, there are two circuits: the transmitter and the receiver, respectively. The transmitter, which doubles as a remote control, will be used to operate the robot. Electrical signals are produced from hand gestures using the accelerometer sensor. These signals are processed by the Arduino Nano before being sent via the RF transmitter. These signals are picked up by the RF receiver on the receiving end, which then sends them to the Arduino Uno for decoding. The Arduino Uno uses the motor driver to activate the motors after receiving the signals, causing the robot to move in one of four directions: "FORWARD," "BACKWARD," "LEFT," or "RIGHT."

### Arduino nano

Robotics, embedded systems, automation, the Internet of Things (IoT), and electronics projects all make extensive use of Arduino boards. Originally designed for students and non-technical consumers, these boards are today known as Arduino boards. Extensively employed in industrial projects. An open-source, compact electronic development board is the Arduino Nano. based on an AVR microprocessor with 8 bits. This board comes in two forms, The ATmega328p is the basis for one, and the ATmega168 for the other. The Arduino Nano can carry out certain tasks that are comparable to those of other boards in the market, but it's smaller and more appropriate for ventures that need less GPIO pins to connect to and less memory space.




### Accelerometer ADXL335

An accelerometer is a device that gauges a structure's acceleration, motion, or vibration. These days, axis-based motion sensors are used in accelerometers found in cameras and smartphones. It is an electromechanical instrument that can measure dynamic or static acceleration. As is well known, acceleration is the measurement of the in velocity upon a specific time. The compass app on your phone makes use of accelerometers. The motion detectors in Accelerometers are also capable of detecting earthquakes. As an additional illustration, when the accelerometers To ascertain the angle at which the instrument is being titled, measure the gravitational pull.



### Motor driver L298N

Stepper motors and DC motors can be driven by this high-power L298N motor driver module. This module is made up of a 78M05 5V regulator and an L298 motor driver IC. Up to four DC motors or two DC motors with direction and speed control can be managed by the L298N Module command.

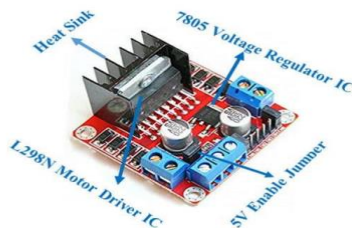

### Transceiver module NRF24L01

Based on packet communication, the enhanced shock burst integrated baseband protocol engine enables a range of modes, from manual operation to sophisticated autonomous protocol operation.

#### Features:

1. GFSK modulation and maximum operational rates of 2 Mbps effectiveness, the capacity to prevent interference.
2. Especially appropriate for situations involving industrial control.
3. 125 channels, frequency hopping, and multi-point connection to fulfill the requirements for communication.
4. Integrated hardware multipoint communication and CRC error detection control the address.
5. Low power consumption (1.9–3.6V, 1uA in power-down mode) Integrated 2.4Ghz antenna
6. A range of microcontrollers can be directly connected to software that can set the address to only receive the local address when output data is received (providing interrupt instruction). Programming software is quite easy.



## APPLICATION

**Assistive Devices for Disabled Individuals:** People with mobility problems can be assisted in navigating their surroundings and carrying out daily tasks such as snacking and opening doors by using robotic arms or gesture-controlled wheelchairs.

**Smart Home Automation:** Gestures can be used to operate home appliances like fans, lighting, and entertainment systems, providing a more natural and intuitive user experience.

**Industrial Robots:** Workers in the manufacturing industry can increase productivity while lowering physical strain by using gestures to operate robots for activities like lifting heavy objects or assembling pieces.

**Interactive Learning Tools:** Gesture-controlled robots can be used as interactive learning tools in classrooms to assist students gain a deeper understanding of electronics, programming, and robotics.

## FUTURE SCOPE

**Healthcare and Rehabilitation:** Gesture-controlled robots can help patients with limited mobility or those with disabilities by allowing hands-free operation of robotic arms, exoskeletons, and other equipment.

**Human-Computer Interaction:** Through gestures, these robots can improve experiences in virtual reality (VR) and augmented reality (AR) and provide more intuitive control.

**Home Automation:** Smart home solutions that allow users to operate appliances or other systems with simple hand gestures can be made simpler using gesture control.

**Industrial Automation:** Incorporating gesture-controlled robots into industrial environments can provide more accurate and versatile control over tools and machines, minimizing human contact and improving security.

**Education and Research:** Robots powered by Arduino are an accessible technology that can be a useful teaching tool for researchers and students exploring robotics, artificial intelligence, and human-machine interaction.

## RESULT



## CONCLUSION

Emerging technology like gesture control has many uses across many industries. Only a little portion of it will be completed by us. The primary goal of the project is to give the robot a more schematic method of control. Because hand gestures are natural to humans, interacting with a robot in a more friendlier manner is made easier with the aid of wireless communication.

## REFERENCE :

- 1) Research of the Gesture Control System for a Industrial Robot- Tiansong Liu<sup>1</sup>, Changzhou Liu<sup>2</sup>, Guojun Branch, Jiangsu Union Technical Institute, Changzhou, China  
Date of Conference: 21-23 July 2023 (IEEE)
- 2) Gesture-Based Human-Robot Interaction Framework for Teleoperation Control of Agricultural Robot- Hongxian Liu<sup>1</sup>, Xiwen Luo<sup>2</sup>, C. L. Philip Chen<sup>3</sup>, Chenguang Yang<sup>4</sup>, Published in: 2023 IEEE International Conference on Unmanned Systems (ICUS)  
Date of Conference: 13-15 October 2023
- 3) Industrial Robot Manipulation using Hand Gesture- Muhsin Al Ramadan S<sup>1</sup>, Jaman Sahaul N<sup>2</sup>, Vishnuvardhan S<sup>3</sup>, Purushothaman S<sup>4</sup>, Ramkumar A<sup>5</sup>, Sivaguru J<sup>6</sup>, Department of Mechatronics, Kumaraguru College of Technology, Coimbatore Published in: 2023 2nd International Conference on Advancements in Electrical, Electronics, Communication, Computing and Automation (ICAECA)  
Date of Conference: 16-17 June 2023
- 4) Gesture Controlled Mobile Robot- Edward Solly<sup>1</sup>,  
Ahmed Aldabbagh<sup>2</sup>, Department of Electrical and Electronic Engineering, The University of Nottingham, Nottingham, United Kingdom-Published in: 2023 5th International Congress on Human-Computer Interaction, Optimization and Robotic Applications (HORA)  
Date of Conference: 08-10 June 2023
- 5) IoT Based Implementation of Gesture-Controlled Robot- Mohd. Abdul Muqet<sup>1</sup>, Narjis Begum<sup>2</sup>, Mohammad Abul Nabeel Hasnain<sup>3</sup>, Afreen Mohammed<sup>4</sup>, Mohammed Abdur Rahman<sup>5</sup>,  
Electrical Engineering Department, Muffakham Jah College of Engineering and Technology, Hyderabad, India
- 6) Gurkirt Singh, Harpreet Kaur -International Journal for Research in Applied Science & Engineering Technology (IJRASET) ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.429 Volume 9 Issue I Jan 2021- Available at www.ijraset.com "Hand Gestures Controlled Robot using Arduino"
- 7) Vrushab Sakpal, Omkar Patil, Sagar Bhagat, Badar Shaikh, Prof. Poonam Patil- International Journal of Recent Trends in Engineering & Research (IJRTER) Volume 04, Issue 04; April- 2018 [ISSN: 2455-1457] "HAND GESTURE CONTROLLED ROBOT USING ARDUINO"
- 8) Ashutosh zagade, Vishakha Jamkhedkar, Shraddha Dhakane, Vrushali Patankar, Prof. Dr.Amol Kasture<sup>5</sup>, Prof.Vijay Gaike- International Journal of Scientific Development and Research (IJS DR) www.ijsdr.org "A STUDY ON GESTURE CONTROL ARDIUNO ROBOT"
- 9) Kathiravan Sekar, Vishnuram Rajkumar, Ramarajan Thileeban, Sri Sudharshan Bedhu Sembian-International Journal of Engineering Research & Technology (IJERT) Published by : <http://www.ijert.org> ISSN: 2278-0181 Vol. 9 Issue 11, November-2020 "Hand Gesture Controlled Robot"
- 10) Veeresh S,Prathamesh Patil, Nithish Kumar N P, Dr. Madhu Patil, -International Journal of Creative Research Thoughts (IJCRT) www.ijcrt.org "HAND GESTURE CONTROLLED ROBOT"
- 11) Amit Awasthi, Neeraj Sharma, Prayag Gupta, Sannidhya Kushwaha-International Research Journal of Modernization in Engineering, Technology and Science "HAND GESTURE CONTROLLER ROBOT CAR USING ARDUINO"
- 12) Suryarajsinh T. Vala-International Journal of Research in Engineering, Science and Management Volume-1, Issue-11, November-2018 [www.ijresm.com](http://www.ijresm.com) | ISSN (Online): 2581-5792 "Hand Gesture Controlled Robot Using Arduino"
- 13) Sachin Kumar Gupta1-Applied Data Science and Smart Systems AIP Conf. Proc. 2916, 040004-1–040004-7; <https://doi.org/10.1063/5.0177522>  
Published by AIP Publishing. 978-0-7354-4733-2/\$30.00 "Arduino-based wireless hand gesture controlled robot"